
PELI-HARDIGG™ TECHNICAL SOLUTIONS

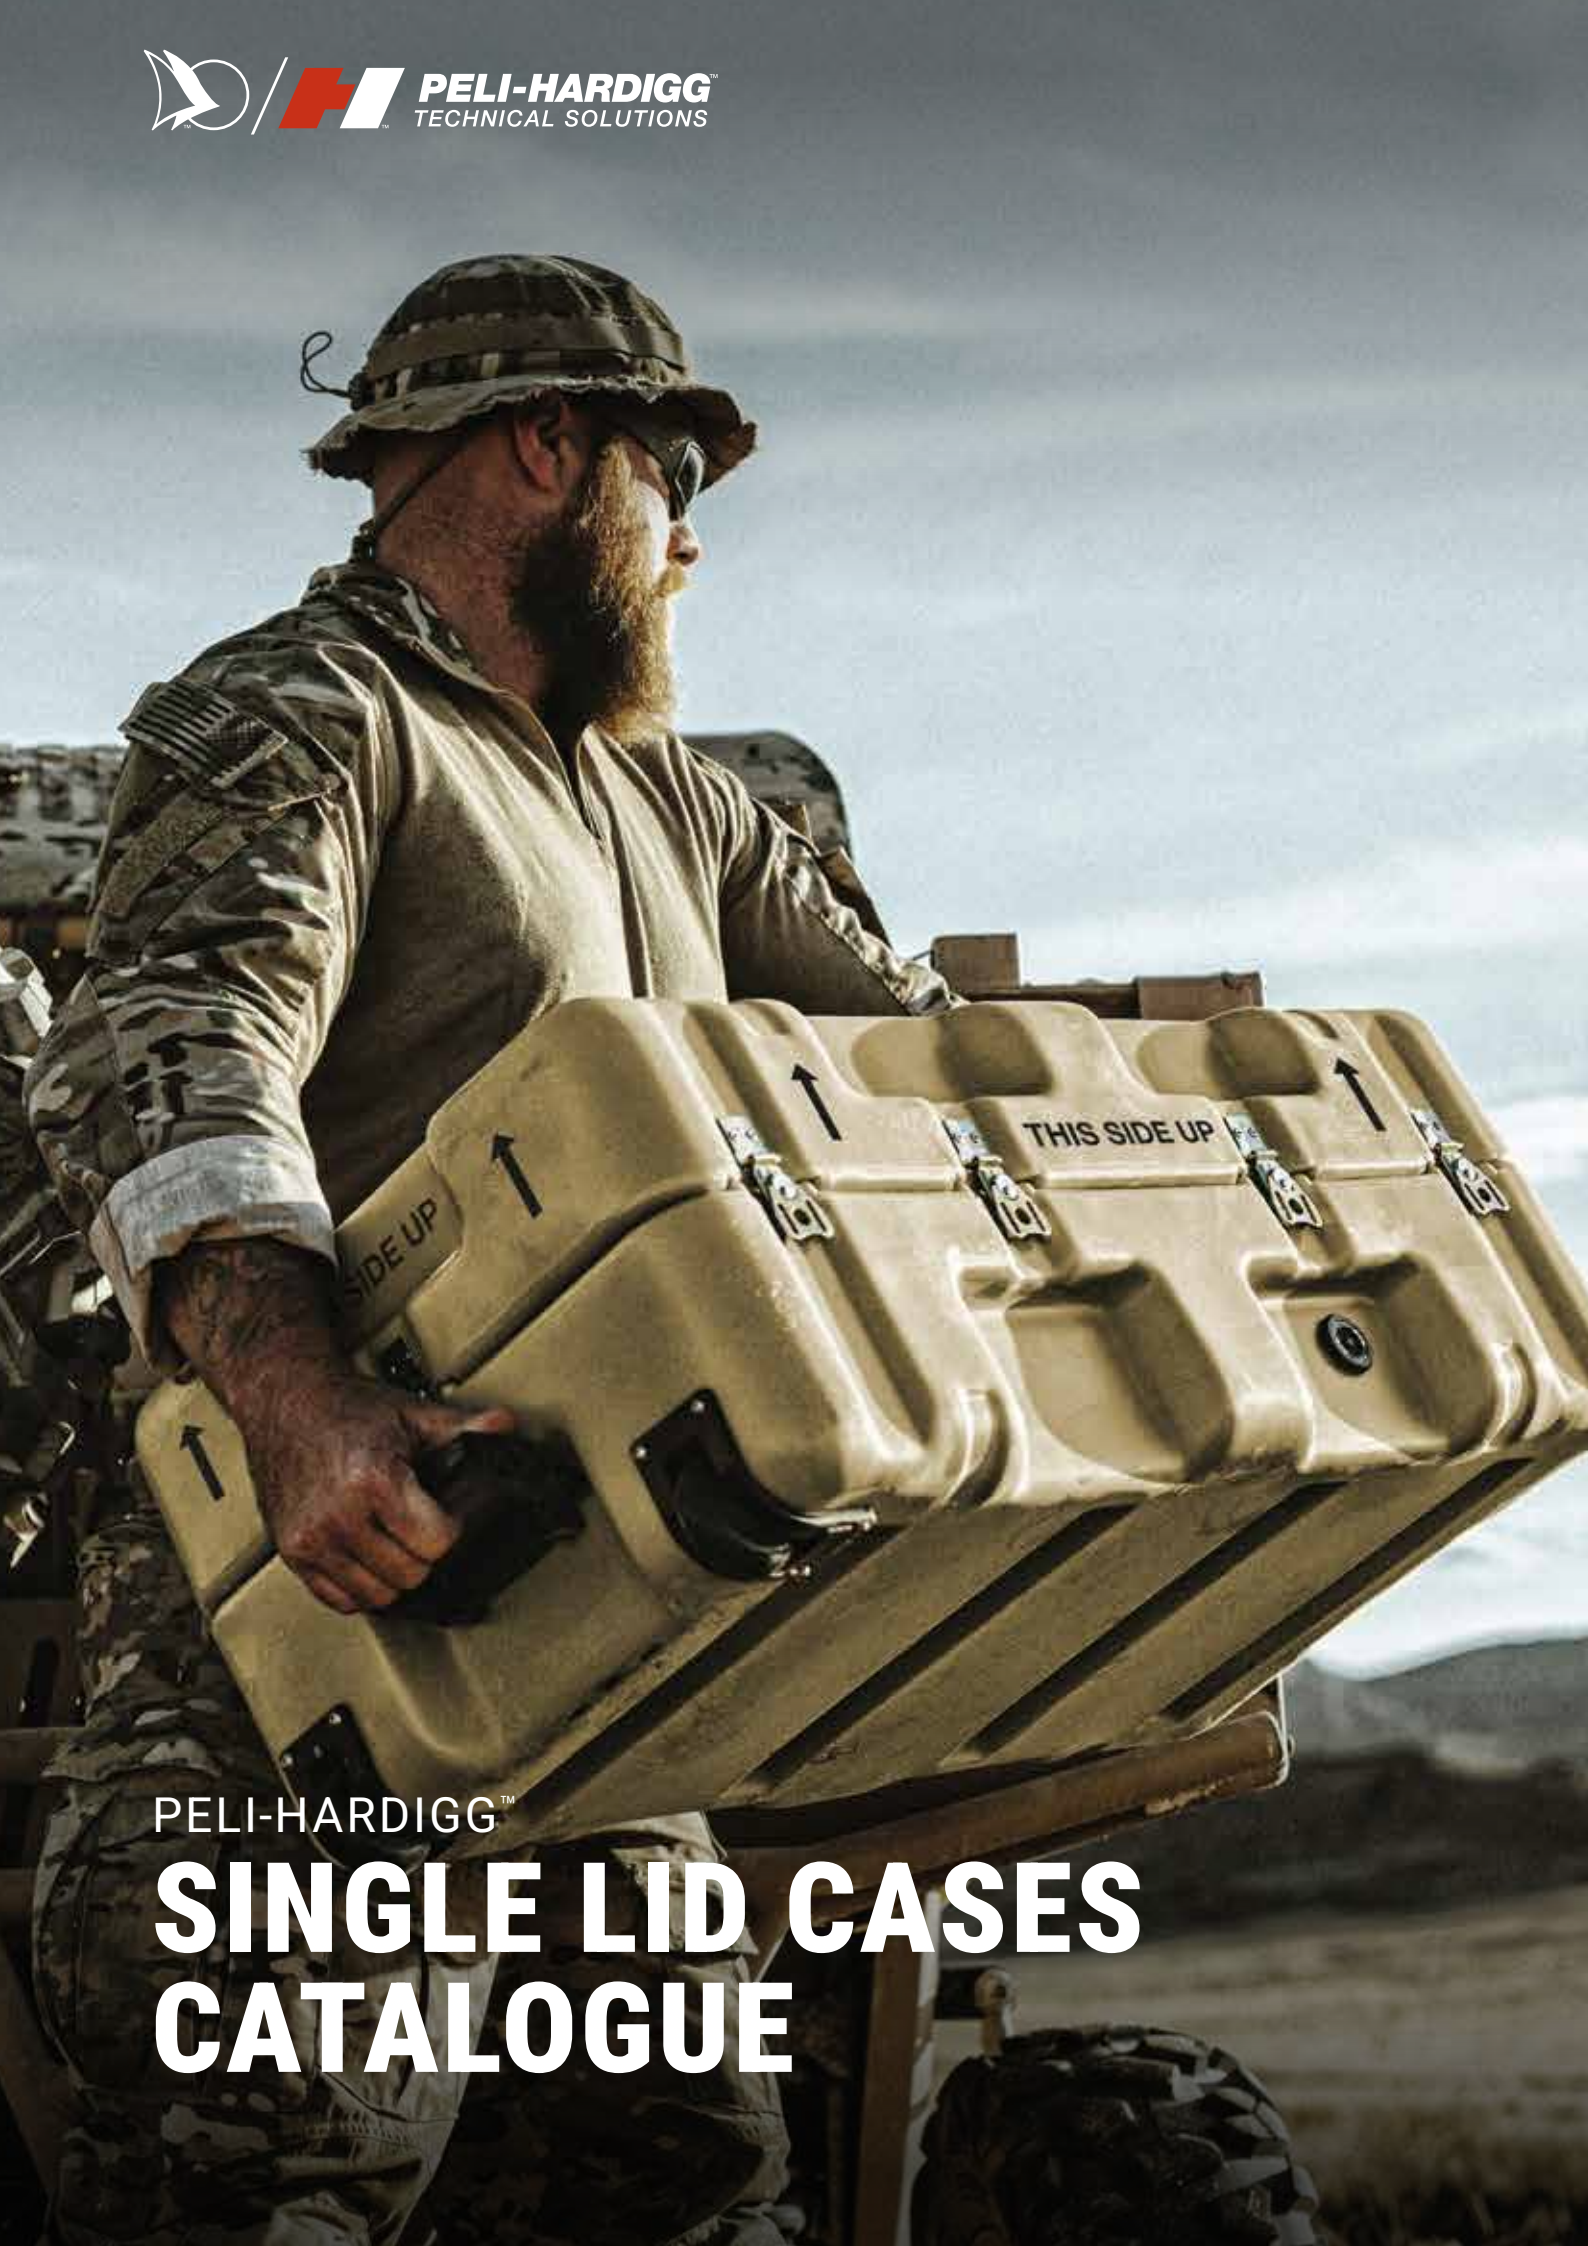

PELI-HARDIGG™

SINGLE LID CASES CATALOGUE

PELI-HARDIGG™
TECHNICAL SOLUTIONS

MADE IN GERMANY
HERGESTELLT IN DEUTSCHLAND

SINGLE LID CASES

Rugged, uncompromising and trusted, Peli cases protect what matters to you, from the everyday to the extraordinary.

Peli-Hardigg™ rotomoulded Single Lid Containers are one-piece constructions, moulded from lightweight, high-impact polyethylene. With 20% more protective material in the edges and corners, where it is needed most, these heavy-duty containers ensure that valuable equipment is protected from impacts and the elements. Proven for over 60 years in the most demanding environments. Engineered and manufactured in the U.S. and Germany.

Available in +500 sizes, Peli-Hardigg Single Lid Containers are completely customisable with a wide range of bolt-on options like document holders, casters, humidity indicators and many more.

FEATURES 4-5

SINGLE LID CASES 6-19
Measurement Guide 7
Light Lift™ Cases 7
Specifications 8
Standard colours 19

OPTIONS 20-21

ACCESSORIES 22-23

For the most up-to-date information, please visit www.peli.com

For the most up-to-date information, please visit www.peli.com

SINGLE LID CASES FEATURES



HIGHER IMPACT RESISTANCE

A Peli-Hardigg Single Lid Case begins as resin powder that is measured and loaded into a mould attached to a biaxial arm. As the mould rotates, it is heated and 15%-20% more resin accumulates in the corners and edges. When the case is dropped (and it will be) it has extra strength where it is needed.

RECESSED HARDWARE, COLUMNAR RIBS

Recessed handles, latches and hinges prevents them from being sheared off during transport. Ribs are moulded in to create incredibly strong forms from lightweight material. Cases of like sizes have matching top and bottom ribs, so they won't shift when stacked.

WATERTIGHT TONGUE AND GROOVE SEAL

Keep your gear dry and dust-free in the harshest environments.

BELLS AND WHISTLES

With accessories and custom services from our Advanced Case Centers, a Peli-Hardigg Case can be a lot more than a box. Next we'll share some important options.

ANTI SHEAR LOCKS

Moulded, interlocking blocks are matched around the rim of the case. When the case takes an impact, the lid stays aligned to the base.

FEATURES

A MOULDED-IN STACKING RIBS
Secure Non-Slip Stacking on Matched Size Cases

B COMFORT GRIP HANDLES
A Peli-Hardigg Patented Feature, Heavy-Duty, Spring Loaded to Lay Flat

C PATENTED MOULDED-IN METAL INSERTS
Catch and Hinge Attachment Points, Designed to Distribute Load to Case Walls

D RECESSED HARDWARE
Hardware Protected from Impact
Snag Free Transport

E DOUBLE WALLED RIM FOR TONGUE-IN-GROOVE SEAL
Remains Sealed After Impact
Splash and Rain Resistant
Air and Watertight Options

F POSITIVE ANTI-SHEAR LOCKS
Prevent Lid Separation Upon Impact
Minimise Hardware Stress

G REINFORCED CORNERS AND EDGES
15% to 20% Thicker Corners and Edges for Added Impact Protection



SINGLE LID CASES

Peli-Hardigg™ Single Lid Cases offer superior protection with rotomolded, high-impact polyethylene construction and reinforced edges. Available in +500 sizes, they are are completely customisable with a wide range of bolt-on options like document holders, casters, humidity indicators and many more.

SEE ALL

MEASUREMENT GUIDE



PARTING-LINEWIDTH

AL = 1.5" (33mm)
BL = 2.0" (54mm)
CL = 1.0" (25mm)
DL = 1.75" (44mm)

AL2216-0803FT/AC/HL/DE/W

(interior sizes in inches)
Dimensions are nominal.
Weights approximate.

FT	**AC**	**HL**	**DE**	**W**
fork truckable	all catch	handle on lid	stacking ribs match Classic Racks	Moulded-in edge casters

LIGHT LIFT™ CASES

Peli-Hardigg™ Light Lift™ containers combine agility and durability. At 30%* lighter than our traditional heavy-duty roto moulded cases, the Peli-Hardigg™ Light Lift™ series allows for faster deployment and reduced shipping costs, without compromising protection.

The new Light Lift case family is geared toward two - or four - man carry operations with a maximum 136 kgs. gross payload.

Peli-Hardigg™ Light Lift™ series: Every gram counts.

Search for this icon in the tables to find the Light Lift™ case models

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
1	**AL1010-0904**	9.93	252	10.00	254	12.70	323	8.70	221	4.00	102	12.93	328	13.00	330	14.39	366	9.80	4.45	0.73	0.02
2	**AL1010-0905**	9.93	252	10.00	254	13.95	354	8.70	221	5.25	133	12.93	328	13.00	330	15.64	397	10.00	4.54	0.80	0.02
3	**AL1010-1404**	9.93	252	10.00	254	17.75	451	13.75	349	4.00	102	13.00	330	13.00	330	19.44	494	11.50	5.22	1.02	0.03
4	**AL1010-1405**	9.93	252	10.00	254	19.00	483	13.75	349	5.25	133	12.93	328	13.00	330	20.69	526	12.40	5.62	1.09	0.03
5	**CL1109-0303HL**	11.00	279	8.00	203	6.00	152	3.00	76	3.00	76	13.12	333	10.87	276	8.19	208	5.40	2.45	0.31	0.01
6	**AL1212-0404FM**	12.00	305	12.00	305	8.21	209	4.21	107	4.00	102	15.00	381	15.00	381	9.90	251	9.50	4.31	0.68	0.02
7	**AL1212-0405FM**	12.00	305	12.00	305	9.33	237	4.21	107	5.12	130	15.00	381	15.00	381	11.02	280	9.70	4.40	0.78	0.02
8	**AL1212-0604FM**	12.00	305	12.00	305	10.31	262	6.31	160	4.00	102	15.00	381	15.00	381	12.00	305	11.00	4.99	0.86	0.02
9	**AL1212-0605FM**	12.00	305	12.00	305	11.31	287	6.31	160	5.12	130	15.00	381	15.00	381	13.00	330	11.20	5.08	0.94	0.03
10	**AL1212-1204FM**	12.00	305	12.00	305	15.27	388	11.27	286	4.00	102	15.00	381	15.00	381	16.96	431	12.80	5.81	1.27	0.04
11	**AL1212-1205FM**	12.00	305	12.00	305	16.39	416	11.27	286	5.12	130	15.00	381	15.00	381	18.08	459	13.10	5.94	1.37	0.04
12	**AL1212-1504FM**	12.00	305	12.00	305	19.18	487	15.18	386	4.00	102	15.00	381	15.00	381	20.87	530	14.70	6.67	1.60	0.05
13	**AL1212-1505FM**	12.00	305	12.00	305	20.30	516	15.18	386	5.12	130	15.00	381	15.00	381	21.99	559	14.90	6.76	1.69	0.05
14	**AL1212-1904**	12.00	305	12.00	305	22.70	577	18.70	475	4.00	102	15.00	381	15.00	381	24.39	620	16.80	7.62	1.89	0.05
15	**AL1212-1905**	12.00	305	12.00	305	23.82	605	18.70	475	5.12	130	15.00	381	15.00	381	25.51	648	17.00	7.71	1.99	0.06
16	**CL1412-0502**	14.00	356	11.87	301	7.43	189	4.93	125	2.50	64	16.87	428	13.87	352	8.44	214	9.40	4.26	0.71	0.02
17	**AL1414-0705**	14.00	356	14.12	359	11.93	303	6.75	171	5.18	132	17.00	432	17.12	435	13.61	346	14.50	6.58	1.36	0.04
18	**AL1413-0505**	14.50	368	13.12	333	10.30	262	5.06	129	5.24	133	17.50	445	16.12	409	11.99	305	13.50	6.12	1.13	0.03
19	**AL1413-1005**	14.50	368	13.12	333	15.42	392	10.18	259	5.24	133	17.50	445	16.12	409	17.11	435	16.50	7.48	1.70	0.05
20	**AL1413-2105**	14.50	368	13.12	333	25.99	660	20.75	527	5.24	133	17.50	445	16.12	409	27.69	703	19.70	8.94	2.86	0.08
21	**AL1616-0404**	15.80	401	15.88	403	7.74	197	3.87	98	3.87	98	18.75	476	18.88	480	9.43	240	12.60	5.72	1.12	0.03
22	**AL1616-0405**	15.80	401	15.88	403	8.99	228	3.87	98	5.12	130	18.75	476	18.88	480	10.69	272	13.70	6.21	1.31	0.04
23	**AL1616-0504**	15.80	401	15.88	403	9.29	236	5.42	138	3.87	98	18.75	476	18.88	480	10.98	279	13.90	6.30	1.35	0.04
24	**AL1616-0505**	15.80	401	15.88	403	10.54	268	5.42	138	5.12	130	18.75	476	18.88	480	12.19	310	14.50	6.58	1.53	0.04
25	**AL1616-1004**	15.80	401	15.88	403	13.74	349	9.87	251	3.87	98	18.75	476	18.88	480	15.43	392	17.20	7.80	2.00	0.06
26	**AL1616-1005**	15.80	401	15.88	403	14.99	381	9.87	251	5.12	130	18.75	476	18.88	480	16.69	424	17.60	7.98	2.18	0.06
27	**AL1616-1204**	15.80	401	15.88	403	15.20	386	11.33	288	3.87	98	18.75	476	18.88	480	16.89	429	17.90	8.12	2.21	0.06
28	**AL1616-0412AC/HL**	15.80	401	15.88	403	16.05	408	4.20	107	12.40	315	18.75	476	18.88	480	17.69	449	17.90	8.12	2.33	0.07
29	**AL1616-1205**	15.80	401	15.88	403	16.45	418	11.33	288	5.12	130	18.75	476	18.88	480	18.14	461	18.60	8.44	2.39	0.07
30	**AL1616-0512AC/HL**	15.80	401	15.88	403	17.60	447	5.42	138	12.18	309	18.75	476	18.88	480	19.19	487	18.50	8.39	2.56	0.07
31	**AL1616-1012AC/HL**	15.80	401	15.88	403	22.05	560	9.87	251	12.18	309	18.75	476	18.88	480	23.69	602	22.40	10.16	3.20	0.09
32	**AL1616-1804**	15.80	401	15.88	403	22.12	562	18.25	464	3.87	98	18.75	476	18.88	480	23.81	605	21.70	9.84	3.21	0.09
33	**AL1616-1805**	15.80	401	15.88	403	23.37	594	18.25	464	5.12	130	18.75	476	18.88	480	25.07	637	22.00	9.98	3.39	0.10
34	**AL1616-1212AC/HL**	15.80	401	15.88	403	23.51	597	11.33	288	12.18	309	18.75	476	18.88	480	25.19	640	23.20	10.52	3.41	0.10
35	**AL1616-1812AC/HL**	15.80	401	15.88	403	30.43	773	18.25	464	12.18	309	18.75	476	18.88	480	32.12	816	26.90	12.20	4.42	0.13
36	**CL1713-0403**	16.88	429	12.88	327	7.38	187	4.38	111	3.00	76	19.00	483	14.88	378	9.07	230	6.80	3.08	0.93	0.03
37	**CL1713-0408AC/HL**	16.88	429	12.88	327	12.00	305	4.38	111	7.62	194	19.00	483	14.88	378	13.69	348	11.00	4.99	1.51	0.04
38	**AL1717-0909AC/HL**	17.00	432	17.00	432	17.86	454	8.86	225	9.00	229	20.00	508	20.00	508	19.55	497	18.80	8.53	2.99	0.08
39	**CL1715-0904**	17.12	435	14.87	378	14.02	356	9.87	251	4.15	105	19.25	489	16.87	428	15.69	399	12.60	5.72	2.07	0.06

AC = All Catch | FM = Flange Mount configuration | HL = Handle On Lid

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
40	**GR1815-0603**	17.90	455	14.50	368	11.50	292	8.40	213	3.10	79	21.00	533	17.50	445	13.10	333	16.00	7.26	1.73	0.05
41	**AL1818-0603HL**	17.93	455	17.93	455	9.55	243	6.37	162	3.18	81	20.93	532	20.93	532	11.25	286	16.50	7.48	1.78	0.05
42	**AL1814-0504**	18.00	457	14.62	371	9.11	231	5.18	132	3.93	100	21.00	533	17.62	448	10.80	274	14.40	6.53	1.39	0.04
43	**AL1814-0505**	18.00	457	14.62	371	10.38	264	5.18	132	5.20	132	21.00	533	17.62	448	12.05	306	15.60	7.08	1.58	0.04
44	**AL1814-1504**	18.00	457	14.62	371	18.86	479	14.93	379	3.93	100	21.00	533	17.62	448	20.55	522	19.30	8.75	2.87	0.08
45	**AL1814-1505**	18.00	457	14.62	371	20.13	511	14.93	379	5.20	132	21.00	533	17.62	448	21.82	554	20.50	9.30	3.07	0.09
46	**AL1814-2204**	18.00	457	14.62	371	26.11	663	22.18	563	3.93	100	21.00	533	17.62	448	27.80	706	23.40	10.61	3.98	0.11
47	**AL1814-2205**	18.00	457	14.62	371	27.38	695	22.18	563	5.20	132	21.00	533	17.62	448	29.07	738	24.60	11.16	4.17	0.12
48	**AL1812-0602**	18.11	460	12.24	311	8.52	216	5.95	151	2.57	65	21.00	533	15.25	387	10.25	260	12.41	5.63	1.09	0.03
49	**AL2015-0503HL**	19.75	502	15.62	397	7.81	198	5.06	129	2.75	70	22.75	578	18.62	473	9.49	241	16.50	7.48	1.39	0.04
50	**AL2015-1503HL**	19.75	502	15.62	397	17.95	456	15.20	386	2.75	70	22.75	578	18.62	473	19.64	499	24.10	10.93	3.20	0.09
51	**AL2013-0403**	19.87	505	13.00	330	7.00	178	4.00	102	3.00	76	22.87	581	16.00	406	8.69	221	13.50	6.12	1.05	0.03
52	**AL2013-0903**	19.87	505	13.00	330	12.25	311	9.25	235	3.00	76	22.87	581	16.00	406	13.94	354	16.80	7.62	1.83	0.05
53	**AL2020-1305**	19.87	505	19.87	505	18.11	460	12.93	328	5.18	132	22.87	581	22.87	581	19.80	503	25.70	11.66	4.14	0.12
54	**CL2012-0902**	20.18	513	11.75	298	11.66	296	9.16	233	2.50	64	22.30	566	13.75	349	13.35	339	12.20	5.53	1.60	0.05
55	**AL2017-0706**	20.24	514	17.15	436	13.00	330	7.00	178	6.00	152	23.24	590	20.15	512	14.82	376	19.10	8.66	2.61	0.07
56	**IS2117-1103**	21.00	533	17.00	432	14.00	356	11.00	279	3.00	76	24.00	610	20.00	508	16.00	406	20.00	9.07	2.89	0.08
57	**AL2216-0503**	22.00	559	16.00	406	8.25	210	5.25	133	3.00	76	25.00	635	19.00	483	10.19	259	17.50	7.94	1.68	0.05
58	**GR2216-0305**	22.00	559	16.00	406	8.30	211	3.00	76	5.30	135	25.00	635	19.00	483	12.10	307	23.00	10.43	1.69	0.05
59	**AL2216-0505**	22.00	559	16.00	406	10.50	267	5.25	133	5.25	133	25.00	635	19.00	483	12.19	310	18.50	8.39	2.14	0.06
60	**AL2216-0803**	22.00	559	16.00	406	11.43	290	8.43	214	3.00	76	25.00	635	19.00	483	13.37	340	19.00	8.62	2.33	0.07
61	**AL2216-0805**	22.00	559	16.00	406	13.68	347	8.43	214	5.25	133	25.00	635	19.00	483	15.37	390	20.00	9.07	2.79	0.08
62	**AL2216-1203**	22.00	559	16.00	406	15.25	387	12.25	311	3.00	76	25.00	635	19.00	483	17.19	437	21.10	9.57	3.11	0.09
63	**AL2216-1205**	22.00	559	16.00	406	17.50	445	12.25	311	5.25	133	25.00	635	19.00	483	19.19	487	22.10	10.02	3.56	0.10
64	**AL2221-0419DE**	22.40	569	21.00	533	23.62	600	4.00	102	19.60	498	25.50	648	24.06	611	25.31	643	32.01	14.51	6.43	0.18
65	**AL2221-0402**	22.50	572	21.06	535	6.15	156	3.90	99	2.25	57	25.50	648	24.06	611	8.31	211	21.20	9.62	1.69	0.05
66	**AL2221-0404**	22.50	572	21.06	535	7.65	194	3.90	99	3.75	95	25.50	648	24.06	611	9.80	249	22.40	10.16	2.10	0.06
67	**AL2221-0602**	22.50	572	21.06	535	8.75	222	6.50	165	2.25	57	25.50	648	24.06	611	10.44	265	22.80	10.34	2.40	0.07
68	**AL2221-0405**	22.50	572	21.06	535	8.90	226	3.90	99	5.00	127	25.50	648	24.06	611	11.00	279	23.30	10.57	2.44	0.07
69	**AL2221-0604**	22.50	572	21.06	535	10.25	260	6.50	165	3.75	95	25.50	648	24.06	611	11.94	303	24.00	10.89	2.81	0.08
70	**AL2221-0605**	22.50	572	21.06	535	11.50	292	6.50	165	5.00	127	25.50	648	24.06	611	13.13	334	24.80	11.25	3.15	0.09
71	**AL2221-1202**	22.50	572	21.06	535	14.31	363	12.06	306	2.25	57	25.50	648	24.06	611	15.99	406	25.00	11.34	3.92	0.11
72	**AL2221-1204**	22.50	572	21.06	535	15.81	402	12.06	306	3.75	95	25.50	648	24.06	611	17.49	444	26.20	11.88	4.34	0.12
73	**AL2221-1205**	22.50	572	21.06	535	17.06	433	12.06	306	5.00	127	25.50	648	24.06	611	18.75	476	27.30	12.38	4.68	0.13
74	**AL2221-0414AC/HL**	22.50	572	21.06	535	18.15	461	3.90	99	14.25	362	25.50	648	24.06	611	20.20	513	30.11	13.65	4.98	0.14
75	**AL2221-0614AC/HL**	22.50	572	21.06	535	20.75	527	6.50	165	14.25	362	25.50	648	24.06	611	22.37	568	29.41	13.34	5.69	0.16
76	**AL2221-1802**	22.50	572	21.06	535	20.87	530	18.62	473	2.25	57	25.50	648	24.06	611	22.56	573	32.01	14.51	5.72	0.16
77	**AL2221-1804**	22.50	572	21.06	535	22.37	568	18.62	473	3.75	95	25.50	648	24.06	611	24.06	611	33.21	15.06	6.13	0.17
78	**AL2221-1805**	22.50	572	21.06	535	23.62	600	18.62	473	5.00	127	25.50	648	24.06	611	25.31	643	34.11	15.47	6.48	0.18

AC = All Catch | DE = Stacking Ribs Match Classic Racks | HL = Handle On Lid | Case model manufactured in Germany

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
79	**AL2221-1214AC**	22.50	572	21.06	535	26.31	668	12.06	306	14.25	362	25.50	648	24.06	611	27.99	711	31.81	14.42	7.21	0.20
80	**AL2221-2802**	22.50	572	21.06	535	30.75	781	28.50	724	2.25	57	25.50	648	24.06	611	32.07	815	38.61	17.51	8.43	0.24
81	**AL2221-2804**	22.50	572	21.06	535	31.87	809	28.12	714	3.75	95	25.50	648	24.06	611	33.57	853	39.81	18.05	8.74	0.25
82	**AL2221-1814AC**	22.50	572	21.06	535	32.87	835	18.62	473	14.25	362	25.50	648	24.06	611	34.57	878	38.61	17.51	9.01	0.26
83	**AL2221-2805**	22.50	572	21.06	535	33.12	841	28.12	714	5.00	127	25.50	648	24.06	611	34.81	884	40.61	18.42	9.08	0.26
84	**AL2221-2814AC**	22.50	572	21.06	535	42.37	1076	28.12	714	14.25	362	25.50	648	24.06	611	44.07	1119	39.11	17.74	11.62	0.33
85	**AL2318-1205**	22.87	581	17.93	455	17.45	443	12.25	311	5.20	132	25.87	657	20.93	532	19.39	493	25.50	11.57	4.14	0.12
86	**AL2318-1705**	22.87	581	17.93	455	22.30	566	17.18	436	5.12	130	25.87	657	20.93	532	24.24	616	29.10	13.20	5.29	0.15
87	**AL2313-1004**	23.00	584	13.00	330	15.48	393	10.85	276	4.63	118	26.00	660	16.00	406	17.67	449	20.20	9.16	2.68	0.08
88	**GR2221-0405**	23.00	584	21.40	544	11.50	292	6.10	155	4.90	124	26.70	678	24.80	630	13.50	343	25.00	11.34	3.28	0.09
89	**AL2315-2507**	23.25	591	15.25	387	32.49	825	25.37	644	7.12	181	26.25	667	18.25	464	35.70	907	32.21	14.61	6.67	0.19
90	**AL2221-2302**	23.30	592	21.40	544	25.40	645	23.30	592	2.10	53	26.50	673	24.60	625	27.50	699	28.50	12.93	7.33	0.21
91	**AL2221-2304**	23.30	592	21.40	544	27.40	696	23.30	592	4.10	104	26.50	673	24.60	625	29.10	739	29.91	13.56	7.91	0.22
92	**AL2221-2305**	23.30	592	21.40	544	28.70	729	23.30	592	5.40	137	26.50	673	24.60	625	30.40	772	30.81	13.97	8.28	0.23
93	**AL2221-2314**	23.30	592	21.40	544	38.10	968	23.30	592	14.80	376	26.50	673	24.60	625	39.90	1013	36.91	16.74	10.99	0.31
94	**AL2316-0604**	23.50	597	15.87	403	11.24	285	6.37	162	4.87	124	26.50	673	18.87	479	13.43	341	19.80	8.98	2.43	0.07
95	**AL2417-1505**	24.00	610	17.00	432	20.02	509	14.84	377	5.18	132	27.00	686	20.00	508	21.96	558	27.30	12.38	4.73	0.13
96	**AL2412-1505**	24.18	614	12.00	305	20.08	510	14.90	378	5.18	132	27.18	690	15.00	381	22.27	566	22.00	9.98	3.37	0.10
97	**AL2414-1604**	24.25	616	14.25	362	20.12	511	16.06	408	4.06	103	27.25	692	17.25	438	22.12	562	23.00	10.43	4.02	0.11
98	**AL2414-0509AC/HL**	24.62	625	14.57	370	14.52	369	5.18	132	9.34	237	27.62	702	17.57	446	16.71	424	23.60	10.70	3.01	0.09
99	**AL2415-0215AC/HL**	24.25	616	15.25	387	16.77	426	1.93	49	14.84	377	27.25	692	18.25	464	18.96	482	25.70	11.66	3.59	0.10
100	**CL2406-0303**	24.75	629	6.62	168	6.12	155	3.06	78	3.06	78	26.87	682	8.62	219	7.81	198	6.60	2.99	0.58	0.02
101	**CL2407-0404**	24.75	629	7.50	191	6.86	174	3.50	89	3.36	85	26.87	682	9.50	241	8.55	217	8.80	3.99	0.74	0.02
102	**AL2423-0503**	24.75	629	23.25	591	7.99	203	4.68	119	3.31	84	27.75	705	26.25	667	11.56	294	23.30	10.57	2.66	0.08
103	**AL2423-0504**	24.75	629	23.25	591	8.58	218	4.68	119	3.90	99	27.75	705	26.25	667	12.15	309	24.00	10.89	2.86	0.08
104	**AL2423-0506**	24.75	629	23.25	591	10.93	278	4.68	119	6.25	159	27.75	705	26.25	667	13.04	331	25.00	11.34	3.64	0.10
105	**AL2423-0903**	24.75	629	23.25	591	12.06	306	8.75	222	3.31	84	27.75	705	26.25	667	15.20	386	24.90	11.29	4.02	0.11
106	**AL2423-0904**	24.75	629	23.25	591	12.65	321	8.75	222	3.90	99	27.75	705	26.25	667	15.79	401	25.60	11.61	4.21	0.12
107	**AL2423-1103**	24.75	629	23.25	591	14.06	357	10.75	273	3.31	84	27.75	705	26.25	667	16.75	425	27.30	12.38	4.68	0.13
108	**AL2423-1104**	24.75	629	23.25	591	14.65	372	10.75	273	3.90	99	27.75	705	26.25	667	17.34	440	28.00	12.70	4.88	0.14
109	**AL2423-0906**	24.75	629	23.25	591	15.00	381	8.75	222	6.25	159	27.75	705	26.25	667	18.19	462	28.00	12.70	5.00	0.14
110	**AL2423-0511AC/HL**	24.75	629	23.25	591	15.93	405	4.68	119	11.25	286	27.75	705	26.25	667	19.55	497	30.21	13.70	5.30	0.15
111	**AL2423-1106**	24.75	629	23.25	591	17.00	432	10.75	273	6.25	159	27.75	705	26.25	667	19.69	500	29.51	13.38	5.66	0.16
112	**AL2423-0911AC/HL**	24.75	629	23.25	591	20.00	508	8.75	222	11.25	286	27.75	705	26.25	667	23.19	589	31.81	14.42	6.66	0.19
113	**AL2423-1111AC/HL**	24.75	629	23.25	591	22.00	559	10.75	273	11.25	286	27.75	705	26.25	667	24.69	627	32.31	14.65	7.33	0.21
114	**AL2617-0604**	26.00	660	17.25	438	9.89	251	6.14	156	3.75	95	29.00	737	20.25	514	12.08	307	22.50	10.21	2.57	0.07
115	**AL2617-1104**	26.00	660	17.25	438	14.75	375	11.00	279	3.75	95	29.00	737	20.25	514	16.94	430	26.20	11.88	3.83	0.11
116	**AL2624-0503**	26.00	660	24.12	613	8.75	222	5.37	136	3.37	86	29.00	737	27.00	686	12.00	305	24.00	10.89	3.18	0.09

AC = All Catch | HL = Handle On Lid

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
117	**AL2624-0503LW**	26.00	660	24.12	613	8.75	222	5.37	136	3.37	86	29.00	737	27.00	686	12.00	305	24.00	10.89	3.18	0.09
118	**AL2624-0505**	26.00	660	24.12	613	10.43	265	5.37	136	5.06	129	29.00	737	27.00	686	13.89	353	28.00	12.70	3.79	0.11
119	**AL2624-0505LW**	26.00	660	24.12	613	10.43	265	5.37	136	5.06	129	29.00	737	27.00	686	13.89	353	28.00	12.70	3.79	0.11
120	**AL2624-0803**	26.00	660	24.12	613	11.43	290	8.06	205	3.37	86	29.00	737	27.00	686	14.50	368	28.00	12.70	4.15	0.12
121	**AL2624-0803LW**	26.00	660	24.12	613	11.43	290	8.06	205	3.37	86	29.00	737	27.00	686	14.50	368	28.00	12.70	4.15	0.12
122	**AL2624-0803W**	26.00	660	24.12	613	11.43	290	8.06	205	3.37	86	29.00	737	27.00	686	14.50	368	28.00	12.70	4.15	0.12
123	**AL2624-0803WLW**	26.00	660	24.12	613	11.43	290	8.06	205	3.37	86	29.00	737	27.00	686	14.50	368	28.00	12.70	4.15	0.12
124	**AL2624-1203**	26.00	660	24.12	613	15.24	387	11.87	301	3.37	86	29.00	737	27.00	686	18.46	469	31.01	14.06	5.53	0.16
125	**AL2624-1203LW**	26.00	660	24.12	613	15.24	387	11.87	301	3.37	86	29.00	737	27.00	686	18.46	469	31.01	14.06	5.53	0.16
126	**AL2624-0513AC**	26.00	660	24.12	613	18.49	470	5.37	136	13.12	333	29.00	737	27.00	686	21.94	557	32.01	14.51	6.71	0.19
127	**AL2624-0513LW**	26.00	660	24.12	613	18.49	470	5.37	136	13.12	333	29.00	737	27.00	686	21.94	557	32.01	14.51	6.71	0.19
128	**AL2624-1803**	26.00	660	24.12	613	21.18	538	17.81	452	3.37	86	29.00	737	27.00	686	25.12	638	35.01	15.88	7.69	0.22
129	**AL2624-1803LW**	26.00	660	24.12	613	21.18	538	17.81	452	3.37	86	29.00	737	27.00	686	25.12	638	35.01	15.88	7.69	0.22
130	**AL2624-0524AC**	26.00	660	24.12	613	29.39	747	5.37	136	24.00	610	29.00	737	27.00	686	32.66	830	42.01	19.05	10.67	0.30
131	**AL2624-2703**	26.00	660	24.12	613	30.04	763	26.67	677	3.37	86	29.00	737	27.00	686	34.37	873	41.01	18.60	10.90	0.31
132	**AL2624-0805**	26.06	662	24.00	610	13.12	333	8.06	205	5.06	129	29.06	738	27.00	686	16.81	427	31.31	14.20	4.75	0.13
133	**AL2624-0805W**	26.06	662	24.00	610	13.12	333	8.06	205	5.06	129	29.06	738	27.00	686	16.81	427	31.31	14.20	4.75	0.13
134	**AL2624-0805LW**	26.06	662	24.00	610	13.12	333	8.06	205	5.06	129	29.06	738	27.00	686	16.81	427	31.31	14.20	4.75	0.13
135	**AL2624-0805WLW**	26.06	662	24.00	610	13.12	333	8.06	205	5.06	129	29.06	738	27.00	686	16.81	427	31.31	14.20	4.75	0.13
136	**AL2624-1205**	26.06	662	24.00	610	16.93	430	11.87	301	5.06	129	29.06	738	27.00	686	20.69	526	34.11	15.47	6.13	0.17
137	**AL2624-1205LW**	26.06	662	24.00	610	16.93	430	11.87	301	5.06	129	29.06	738	27.00	686	20.69	526	34.11	15.47	6.13	0.17
138	**AL2624-0813AC/HL**	26.06	662	24.00	610	21.18	538	8.06	205	13.12	333	29.06	738	27.00	686	24.87	632	36.21	16.42	7.67	0.22
139	**AL2624-0813LW**	26.06	662	24.00	610	21.18	538	8.06	205	13.12	333	29.06	738	27.00	686	24.87	632	36.21	16.42	7.67	0.22
140	**AL2624-1805**	26.06	662	24.00	610	22.87	581	17.81	452	5.06	129	29.06	738	27.00	686	26.62	676	38.51	17.46	8.28	0.23
141	**AL2624-1213AC/HL**	26.06	662	24.00	610	24.99	635	11.87	301	13.12	333	29.06	738	27.00	686	28.69	729	38.21	17.33	9.05	0.26
142	**AL2624-1813AC/HL**	26.06	662	24.00	610	30.93	786	17.81	452	13.12	333	29.06	738	27.00	686	34.62	879	43.51	19.73	11.20	0.32
143	**AL2624-2705**	26.06	662	24.00	610	31.73	806	26.67	677	5.06	129	29.06	738	27.00	686	35.48	901	44.51	20.18	11.48	0.33
144	**AL2624-0824AC/HL**	26.06	662	24.00	610	32.06	814	8.06	205	24.00	610	29.06	738	27.00	686	35.75	908	45.41	20.59	11.60	0.33
145	**AL2624-1224AC/HL**	26.06	662	24.00	610	35.87	911	11.87	301	24.00	610	29.06	738	27.00	686	39.57	1005	48.21	21.86	12.98	0.37
146	**AL2624-2713AC**	26.06	662	24.00	610	39.79	1011	26.67	677	13.12	333	29.06	738	27.00	686	43.48	1104	49.41	22.41	14.40	0.41
147	**AL2624-1824AC**	26.06	662	24.00	610	41.81	1062	17.81	452	24.00	610	29.06	738	27.00	686	45.50	1156	52.41	23.77	15.13	0.43
148	**AL2624-2724AC**	26.06	662	24.00	610	50.67	1287	26.67	677	24.00	610	29.06	738	27.00	686	54.73	1390	58.31	26.44	18.34	0.52
149	**AL2727-0404**	27.00	686	27.00	686	7.49	190	3.62	92	3.87	98	30.00	762	30.00	762	9.69	246	30.51	13.83	3.16	0.09
150	**AL2727-0404LW**	27.00	686	27.00	686	7.49	190	3.62	92	3.87	98	30.00	762	30.00	762	9.69	246	30.51	13.83	3.16	0.09
151	**AL2727-0405**	27.00	686	27.00	686	8.62	219	3.62	92	5.00	127	30.00	762	30.00	762	10.81	275	32.01	14.51	3.64	0.10
152	**AL2727-0405LW**	27.00	686	27.00	686	8.62	219	3.62	92	5.00	127	30.00	762	30.00	762	10.81	275	32.01	14.51	3.64	0.10
153	**AL2727-0504**	27.00	686	27.00	686	8.87	225	5.00	127	3.87	98	30.00	762	30.00	762	11.06	281	30.61	13.88	3.74	0.11
154	**AL2727-0504LW**	27.00	686	27.00	686	8.87	225	5.00	127	3.87	98	30.00	762	30.00	762	11.06	281	30.61	13.88	3.74	0.11
155	**AL2727-0505**	27.00	686	27.00	686	10.00	254	5.00	127	5.00	127	30.00	762	30.00	762	12.19	310	32.01	14.51	4.22	0.12

AC = All Catch | HL = Handle On Lid | LW = Light Lift | W = Moulded-in edge casters

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

			Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
			L		W		H						L		W		H					
	NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
✓	156	**AL2727-0505LW**	27.00	686	27.00	686	10.00	254	5.00	127	5.00	127	30.00	762	30.00	762	12.19	310	32.01	14.51	4.22	0.12
	157	**AL2727-0904**	27.00	686	27.00	686	12.67	322	8.80	224	3.87	98	30.00	762	30.00	762	14.86	377	33.01	14.97	5.35	0.15
✓	158	**AL2727-0904LW**	27.00	686	27.00	686	12.67	322	8.80	224	3.87	98	30.00	762	30.00	762	14.86	377	33.01	14.97	5.35	0.15
	159	**AL2727-0409AC/HL**	27.00	686	27.00	686	12.87	327	3.62	92	9.25	235	30.00	762	30.00	762	15.06	383	34.51	15.65	5.43	0.15
✓	160	**AL2727-0409LW**	27.00	686	27.00	686	12.87	327	3.62	92	9.25	235	30.00	762	30.00	762	15.06	383	34.51	15.65	5.43	0.15
	161	**AL2727-0905**	27.00	686	27.00	686	13.80	351	8.80	224	5.00	127	30.00	762	30.00	762	15.99	406	34.51	15.65	5.82	0.16
✓	162	**AL2727-0905LW**	27.00	686	27.00	686	13.80	351	8.80	224	5.00	127	30.00	762	30.00	762	15.99	406	34.51	15.65	5.82	0.16
	163	**AL2727-0509AC/HL**	27.00	686	27.00	686	14.25	362	5.00	127	9.25	235	30.00	762	30.00	762	16.44	418	34.61	15.69	6.01	0.17
✓	164	**AL2727-0509LW**	27.00	686	27.00	686	14.25	362	5.00	127	9.25	235	30.00	762	30.00	762	16.44	418	34.61	15.69	6.01	0.17
	165	**AL2727-0414AC/HL**	27.00	686	27.00	686	17.87	454	3.62	92	14.25	362	30.00	762	30.00	762	20.06	510	38.51	17.46	7.54	0.21
✓	166	**AL2727-0414LW**	27.00	686	27.00	686	17.87	454	3.62	92	14.25	362	30.00	762	30.00	762	20.06	510	38.51	17.46	7.54	0.21
	167	**AL2727-1404**	27.00	686	27.00	686	17.99	457	14.12	359	3.87	98	30.00	762	30.00	762	20.18	513	37.11	16.83	7.59	0.21
✓	168	**AL2727-1404LW**	27.00	686	27.00	686	17.99	457	14.12	359	3.87	98	30.00	762	30.00	762	20.18	513	37.11	16.83	7.59	0.21
	169	**AL2727-0909AC/HL**	27.00	686	27.00	686	18.05	458	8.80	224	9.25	235	30.00	762	30.00	762	20.24	514	37.01	16.78	7.61	0.22
✓	170	**AL2727-0909LW**	27.00	686	27.00	686	18.05	458	8.80	224	9.25	235	30.00	762	30.00	762	20.24	514	37.01	16.78	7.61	0.22
	171	**AL2727-1405**	27.00	686	27.00	686	19.12	486	14.12	359	5.00	127	30.00	762	30.00	762	21.31	541	38.61	17.51	8.07	0.23
	172	**AL2727-1405**	27.00	686	27.00	686	19.12	486	14.12	359	5.00	127	30.00	762	30.00	762	21.31	541	38.61	17.51	8.07	0.23
	173	**AL2727-0514AC/HL**	27.00	686	27.00	686	19.25	489	5.00	127	14.25	362	30.00	762	30.00	762	21.44	545	38.71	17.55	8.12	0.23
✓	174	**AL2727-0514LW**	27.00	686	27.00	686	19.25	489	5.00	127	14.25	362	30.00	762	30.00	762	21.44	545	38.71	17.55	8.12	0.23
	175	**AL2727-0914AC/HL**	27.00	686	27.00	686	23.05	585	8.80	224	14.25	362	30.00	762	30.00	762	25.24	641	41.11	18.64	9.72	0.28
	176	**AL2727-1409AC**	27.00	686	27.00	686	23.37	594	14.12	359	9.25	235	30.00	762	30.00	762	25.56	649	41.11	18.64	9.86	0.28
	177	**AL2727-2304**	27.00	686	27.00	686	26.62	676	22.75	578	3.87	98	30.00	762	30.00	762	28.79	731	43.21	19.60	11.23	0.32
	178	**AL2727-2305**	27.00	686	27.00	686	27.75	705	22.75	578	5.00	127	30.00	762	30.00	762	29.94	760	43.31	19.64	11.71	0.33
	179	**AL2727-1414AC/HL**	27.00	686	27.00	686	28.37	721	14.12	359	14.25	362	30.00	762	30.00	762	30.56	776	45.21	20.50	11.97	0.34
	180	**AL2727-2704**	27.00	686	27.00	686	30.84	783	26.97	685	3.87	98	30.00	762	30.00	762	33.03	839	47.61	21.59	13.01	0.37
	181	**AL2727-2705**	27.00	686	27.00	686	31.97	812	26.97	685	5.00	127	30.00	762	30.00	762	34.19	868	49.01	22.23	13.49	0.38
	182	**AL2727-2309AC**	27.00	686	27.00	686	32.00	813	22.75	578	9.25	235	30.00	762	30.00	762	34.19	868	49.01	22.23	13.50	0.38
	183	**AL2727-2709AC**	27.00	686	27.00	686	36.22	920	26.97	685	9.25	235	30.00	762	30.00	762	38.41	976	51.61	23.41	15.28	0.43
	184	**AL2727-2314AC**	27.00	686	27.00	686	37.00	940	22.75	578	14.25	362	30.00	762	30.00	762	39.19	995	53.01	24.04	15.61	0.44
	185	**AL2727-2714AC**	27.00	686	27.00	686	41.22	1047	26.97	685	14.25	362	30.00	762	30.00	762	43.41	1103	55.51	25.17	17.39	0.49
	186	**AL2818-0805**	28.12	714	18.12	460	13.24	336	8.12	206	5.12	130	31.12	790	21.12	536	15.43	392	26.50	12.02	3.90	0.11
✓	187	**AL2818-0805LW**	28.12	714	18.12	460	13.24	336	8.12	206	5.12	130	31.12	790	21.12	536	15.43	392	26.50	12.02	3.90	0.11
	188	**AL2822-1212AC**	28.13	715	24.25	616	22.13	562	12.12	308	12.13	308	31.25	794	25.25	641	26.75	679	38.51	17.46	8.74	0.25
	189	**AL2825-1212**	28.13	715	25.00	635	24.92	633	12.62	321	12.30	312	31.50	800	28.00	711	26.43	671	44.01	19.96	10.14	0.29
	190	**AL2909-0605**	28.50	724	8.50	216	11.25	286	6.00	152	5.25	133	31.50	800	11.50	292	12.94	329	15.90	7.21	1.58	0.04
✓	191	**AL2909-0605LW**	28.50	724	8.50	216	11.25	286	6.00	152	5.25	133	31.50	800	11.50	292	12.94	329	15.90	7.21	1.58	0.04
	192	**AL2825-1205**	28.50	724	25.00	635	17.74	451	12.62	321	5.12	130	31.50	800	28.00	711	19.43	494	37.41	16.96	7.31	0.21
	193	**AL2825-1605**	28.50	724	25.00	635	21.62	549	16.50	419	5.12	130	31.50	800	28.00	711	23.86	606	39.01	17.69	8.91	0.25
	194	**AL2825-1612AC/HL**	28.50	724	25.00	635	28.80	732	16.50	419	12.30	312	31.50	800	28.00	711	30.99	787	45.61	20.68	11.88	0.34

AC = All Catch | HL = Handle On Lid | LW = Light Lift

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

			Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
			L		W		H						L		W		H					
	NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
✓	195	**AL2914-0905LW**	28.87	733	14.50	368	14.05	357	8.87	225	5.18	132	31.87	809	17.50	445	16.00	406	23.10	10.48	3.40	0.10
	196	**AL2914-0905**	28.87	733	14.50	368	14.05	357	8.87	225	5.18	132	31.87	809	17.50	445	16.00	406	23.10	10.48	3.40	0.10
✓	197	**AL2914-0906LW**	28.87	733	14.50	368	15.05	382	8.87	225	6.18	157	31.87	809	17.50	445	17.00	432	24.50	11.11	3.65	0.10
	198	**AL2914-0906**	28.87	733	14.50	368	15.05	382	8.87	225	6.18	157	31.87	809	17.50	445	17.00	432	24.50	11.11	3.65	0.10
	199	**IS2917-1103W**	29.00	737	17.00	432	14.00	356	11.00	279	3.00	76	32.00	813	20.00	508	16.00	406	26.00	11.79	3.99	0.11
	200	**AL2924-0904**	29.24	743	23.87	606	13.31	338	9.34	237	3.97	101	32.24	819	26.87	682	15.50	394	30.31	13.74	5.38	0.15
	201	**AL2914-0605**	29.60	752	14.80	376	11.30	287	5.90	150	5.40	137	32.80	833	18.00	457	12.90	328	20.60	9.34	2.86	0.08
✓	202	**AL2914-0605LW**	29.60	752	14.80	376	11.30	287	5.90	150	5.40	137	32.80	833	18.00	457	12.90	328	20.60	9.34	2.86	0.08
	203	**AL2914-0606**	29.60	752	14.80	376	12.60	320	5.90	150	6.70	170	32.80	833	18.00	457	14.20	361	21.50	9.75	3.19	0.09
✓	204	**AL2914-0606LW**	29.60	752	14.80	376	12.60	320	5.90	150	6.70	170	32.80	833	18.00	457	14.20	361	21.50	9.75	3.19	0.09
	205	**AL2914-0618**	29.60	752	14.80	376	25.70	653	5.90	150	19.80	503	32.80	833	18.00	457	27.30	693	29.51	13.38	6.52	0.18
	206	**AL2914-0918**	29.60	752	14.80	376	29.00	737	9.20	234	19.80	503	32.80	833	18.00	457	30.50	775	42.51	19.28	7.35	0.21
✓	207	**AL3018-0402LW**	29.75	756	17.87	454	7.12	181	4.50	114	2.62	67	32.75	832	20.87	530	8.94	227	20.40	9.25	2.19	0.06
	208	**AL3018-0402**	29.75	756	17.87	454	7.12	181	4.50	114	2.62	67	32.75	832	20.87	530	8.94	227	20.40	9.25	2.19	0.06
✓	209	**AL3018-0403LW**	29.75	756	17.87	454	8.12	206	4.50	114	3.62	92	32.75	832	20.87	530	9.94	252	21.20	9.62	2.50	0.07
	210	**AL3018-0403**	29.75	756	17.87	454	8.12	206	4.50	114	3.62	92	32.75	832	20.87	530	9.94	252	21.20	9.62	2.50	0.07
✓	211	**AL3018-0405LW**	29.75	756	17.87	454	9.75	248	4.50	114	5.25	133	32.75	832	20.87	530	11.56	294	21.50	9.75	3.00	0.08
	212	**AL3018-0405**	29.75	756	17.87	454	9.75	248	4.50	114	5.25	133	32.75	832	20.87	530	11.56	294	21.50	9.75	3.00	0.08
✓	213	**AL3018-0802LW**	29.75	756	17.87	454	10.80	274	8.18	208	2.62	67	32.75	832	20.87	530	12.61	320	24.90	11.29	3.32	0.09
	214	**AL3018-0802W**	29.75	756	17.87	454	10.80	274	8.18	208	2.62	67	32.75	832	20.87	530	12.61	320	24.90	11.29	3.32	0.09
✓	215	**AL3018-0802WLW**	29.75	756	17.87	454	10.80	274	8.18	208	2.62	67	32.75	832	20.87	530	12.61	320	24.90	11.29	3.32	0.09
	216	**AL3018-0802**	29.75	756	17.87	454	10.80	274	8.18	208	2.62	67	32.75	832	20.87	530	12.61	320	24.90	11.29	3.32	0.09
✓	217	**AL3018-0803LW**	29.75	756	17.87	454	11.80	300	8.18	208	3.62	92	32.75	832	20.87	530	13.61	346	25.70	11.66	3.63	0.10
	218	**AL3018-0803W**	29.75	756	17.87	454	11.80	300	8.18	208	3.62	92	32.75	832	20.87	530	13.61	346	25.70	11.66	3.63	0.10
✓	219	**AL3018-0803WLW**	29.75	756	17.87	454	11.80	300	8.18	208	3.62	92	32.75	832	20.87	530	13.61	346	25.70	11.66	3.63	0.10
	220	**AL3018-0803**	29.75	756	17.87	454	11.80	300	8.18	208	3.62	92	32.75	832	20.87	530	13.61	346	25.70	11.66	3.63	0.10
✓	221	**AL3018-0902LW**	29.75	756	17.87	454	11.99	305	9.37	238	2.62	67	32.75	832	20.87	530	13.81	351	26.80	12.16	3.69	0.10
	222	**AL3018-0902W**	29.75	756	17.87	454	11.99	305	9.37	238	2.62	67	32.75	832	20.87	530	13.81	351	26.80	12.16	3.69	0.10
✓	223	**AL3018-0902WLW**	29.75	756	17.87	454	11.99	305	9.37	238	2.62	67	32.75	832	20.87	530	13.81	351	26.80	12.16	3.69	0.10
	224	**AL3018-0902**	29.75	756	17.87	454	11.99	305	9.37	238	2.62	67	32.75	832	20.87	530	13.81	351	26.80	12.16	3.69	0.10
✓	225	**AL3018-0903LW**	29.75	756	17.87	454	12.99	330	9.37	238	3.62	92	32.75	832	20.87	530	14.81	376	27.60	12.52	4.00	0.11
	226	**AL3018-0903W**	29.75	756	17.87	454	12.99	330	9.37	238	3.62	92	32.75	832	20.87	530	14.81	376	27.60	12.52	4.00	0.11
✓	227	**AL3018-0903WLW**	29.75	756	17.87	454	12.99	330	9.37	238	3.62	92	32.75	832	20.87	530	14.81	376	27.60	12.52	4.00	0.11
	228	**AL3018-0903**	29.75	756	17.87	454	12.99	330	9.37	238	3.62	92	32.75	832	20.87	530	14.81	376	27.60	12.52	4.00	0.11
✓	229	**AL3018-0805LW**	29.75	756	17.87	454	13.43	341	8.18	208	5.25	133	32.75	832	20.87	530	15.24	387	26.00	11.79	4.13	0.12
	230	**AL3018-0805W**	29.75	756	17.87	454	13.43	341	8.18	208	5.25	133	32.75	832	20.87	530	15.24	387	26.00	11.79	4.13	0.12
✓	231	**AL3018-0805WLW**	29.75	756	17.87	454	13.43	341	8.18	208	5.25	133	32.75	832	20.87	530	15.24	387	26.00	11.79	4.13	0.12
	232	**AL3018-0805**	29.75	756	17.87	454	13.43	341	8.18	208	5.25	133	32.75	832	20.87	530	15.24	387	26.00	11.79	4.13	0.12
✓	233	**AL3018-0409LW**	29.75	756	17.87	454	13.75	349	4.50	114	9.25	235	32.75	832	20.87	530	15.56	395	27.70	12.56	4.23	0.12

LW = Light Lift | W = Moulded-in edge casters

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
234	**AL3018-0409**	29.75	756	17.87	454	13.75	349	4.50	114	9.25	235	32.75	832	20.87	530	15.56	395	27.70	12.56	4.23	0.12
235	**AL3018-0905LW**	29.75	756	17.87	454	14.62	371	9.37	238	5.25	133	32.75	832	20.87	530	16.43	417	27.80	12.61	4.50	0.13
236	**AL3018-0905W**	29.75	756	17.87	454	14.62	371	9.37	238	5.25	133	32.75	832	20.87	530	16.43	417	27.80	12.61	4.50	0.13
237	**AL3018-0905WLW**	29.75	756	17.87	454	14.62	371	9.37	238	5.25	133	32.75	832	20.87	530	16.43	417	27.80	12.61	4.50	0.13
238	**AL3018-0905**	29.75	756	17.87	454	14.62	371	9.37	238	5.25	133	32.75	832	20.87	530	16.43	417	27.80	12.61	4.50	0.13
239	**AL3018-0809LW**	29.75	756	17.87	454	17.43	443	8.18	208	9.25	235	32.75	832	20.87	530	19.24	489	32.21	14.61	5.36	0.15
240	**AL3018-0809WLW**	29.75	756	17.87	454	17.43	443	8.18	208	9.25	235	32.75	832	20.87	530	19.24	489	32.21	14.61	5.36	0.15
241	**AL3018-0809**	29.75	756	17.87	454	17.43	443	8.18	208	9.25	235	32.75	832	20.87	530	19.24	489	32.21	14.61	5.36	0.15
242	**AL3018-0809W**	29.75	756	17.87	454	17.43	443	8.18	208	9.25	235	32.75	832	20.87	530	19.24	489	32.21	14.61	5.36	0.15
243	**AL3018-1502LW**	29.75	756	17.87	454	17.49	444	14.87	378	2.62	67	32.75	832	20.87	530	19.31	490	29.71	13.47	5.38	0.15
244	**AL3018-1502W**	29.75	756	17.87	454	17.49	444	14.87	378	2.62	67	32.75	832	20.87	530	19.31	490	29.71	13.47	5.38	0.15
245	**AL3018-1502WLW**	29.75	756	17.87	454	17.49	444	14.87	378	2.62	67	32.75	832	20.87	530	19.31	490	29.71	13.47	5.38	0.15
246	**AL3018-1502**	29.75	756	17.87	454	17.49	444	14.87	378	2.62	67	32.75	832	20.87	530	19.31	490	29.71	13.47	5.38	0.15
247	**AL3018-1503LW**	29.75	756	17.87	454	18.49	470	14.87	378	3.62	92	32.75	832	20.87	530	20.31	516	30.51	13.83	5.69	0.16
248	**AL3018-1503W**	29.75	756	17.87	454	18.49	470	14.87	378	3.62	92	32.75	832	20.87	530	20.31	516	30.51	13.83	5.69	0.16
249	**AL3018-1503WLW**	29.75	756	17.87	454	18.49	470	14.87	378	3.62	92	32.75	832	20.87	530	20.31	516	30.51	13.83	5.69	0.16
250	**AL3018-1503**	29.75	756	17.87	454	18.49	470	14.87	378	3.62	92	32.75	832	20.87	530	20.31	516	30.51	13.83	5.69	0.16
251	**AL3018-0909LW**	29.75	756	17.87	454	18.62	473	9.37	238	9.25	235	32.75	832	20.87	530	20.43	519	33.91	15.38	5.73	0.16
252	**AL3018-0909W**	29.75	756	17.87	454	18.62	473	9.37	238	9.25	235	32.75	832	20.87	530	20.43	519	33.91	15.38	5.73	0.16
253	**AL3018-0909WLW**	29.75	756	17.87	454	18.62	473	9.37	238	9.25	235	32.75	832	20.87	530	20.43	519	33.91	15.38	5.73	0.16
254	**AL3018-0909**	29.75	756	17.87	454	18.62	473	9.37	238	9.25	235	32.75	832	20.87	530	20.43	519	33.91	15.38	5.73	0.16
255	**AL3018-1505LW**	29.75	756	17.87	454	20.12	511	14.87	378	5.25	133	32.75	832	20.87	530	21.93	557	31.81	14.42	6.19	0.18
256	**AL3018-1505W**	29.75	756	17.87	454	20.12	511	14.87	378	5.25	133	32.75	832	20.87	530	21.93	557	31.81	14.42	6.19	0.18
257	**AL3018-1505WLW**	29.75	756	17.87	454	20.12	511	14.87	378	5.25	133	32.75	832	20.87	530	21.93	557	31.81	14.42	6.19	0.18
258	**AL3018-1505**	29.75	756	17.87	454	20.12	511	14.87	378	5.25	133	32.75	832	20.87	530	21.93	557	31.81	14.42	6.19	0.18
259	**AL3018-1509LW**	29.75	756	17.87	454	24.12	613	14.87	378	9.25	235	32.75	832	20.87	530	25.93	659	37.01	16.78	7.42	0.21
260	**AL3018-1509W**	29.75	756	17.87	454	24.12	613	14.87	378	9.25	235	32.75	832	20.87	530	25.93	659	37.01	16.78	7.42	0.21
261	**AL3018-1509WLW**	29.75	756	17.87	454	24.12	613	14.87	378	9.25	235	32.75	832	20.87	530	25.93	659	37.01	16.78	7.42	0.21
262	**AL3018-1509**	29.75	756	17.87	454	24.12	613	14.87	378	9.25	235	32.75	832	20.87	530	25.93	659	37.01	16.78	7.42	0.21
263	**AL3018-3602W**	29.75	756	17.87	454	38.87	987	36.25	921	2.62	67	32.75	832	20.87	530	40.68	1033	43.01	19.50	11.96	0.34
264	**AL3018-3602**	29.75	756	17.87	454	38.87	987	36.25	921	2.62	67	32.75	832	20.87	530	40.68	1033	43.01	19.50	11.96	0.34
265	**AL3018-3603W**	29.75	756	17.87	454	39.87	1013	36.25	921	3.62	92	32.75	832	20.87	530	41.68	1059	43.81	19.87	12.27	0.35
266	**AL3018-3603**	29.75	756	17.87	454	39.87	1013	36.25	921	3.62	92	32.75	832	20.87	530	41.68	1059	43.81	19.87	12.27	0.35
267	**AL3018-3605WRA**	29.75	756	17.87	454	41.50	1054	5.25	133	36.25	921	32.75	832	20.87	530	43.31	1100	44.31	20.09	12.77	0.36
268	**AL3018-3605W**	29.75	756	17.87	454	41.50	1054	36.25	921	5.25	133	32.75	832	20.87	530	43.31	1100	44.31	20.09	12.77	0.36
269	**AL3018-3605**	29.75	756	17.87	454	41.50	1054	36.25	921	5.25	133	32.75	832	20.87	530	43.31	1100	44.31	20.09	12.77	0.36
270	**AL3018-3609W**	29.75	756	17.87	454	45.50	1156	36.25	921	9.25	235	32.75	832	20.87	530	47.31	1202	50.31	22.82	14.00	0.40
271	**AL3018-3609AC**	29.75	756	17.87	454	45.50	1156	36.25	921	9.25	235	32.75	832	20.87	530	47.31	1202	50.31	22.82	14.00	0.40
272	**AL3018-2302**	29.75	756	17.88	454	26.38	670	23.75	603	2.62	67	32.75	832	20.88	530	28.19	716	38.01	17.24	8.12	0.23

AC = All Catch | LW = Light Lift | RA = Reverse Application | W = Moulded-in edge casters

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

		Interior Dimensions						Base		Lid		Exterior Dimensions						Weight		Volume	
		L		W		H						L		W		H					
NO.	Case Size	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg	ft³	m³
273	**AL3018-2303**	29.75	756	17.88	454	27.38	695	23.75	603	3.62	92	32.75	832	20.88	530	29.19	741	40.51	18.37	8.43	0.24
274	**AL3018-2305**	29.75	756	17.88	454	29.00	737	23.75	603	5.25	133	32.75	832	20.88	530	30.81	783	40.51	18.37	8.93	0.25
275	**AL3018-2309**	29.75	756	17.88	454	33.00	838	23.75	603	9.25	235	32.75	832	20.88	530	34.81	884	43.01	19.50	10.16	0.29
276	**AL3022-0705**	30.00	762	22.18	563	12.18	309	7.00	178	5.18	132	33.00	838	25.18	640	13.97	355	36.81	16.69	4.69	0.13
277	**AL3022-0405W**	30.00	770	22.00	567	10.00	265	4.50	114	6.00	150	33.00	845	25.00	644	12.00	300	32.00	14.40	4.24	0.12
278	**AL3019-0709AC/HL**	30.75	781	19.62	498	16.98	431	7.64	194	9.34	237	33.75	857	22.62	575	19.67	500	40.61	18.42	5.93	0.17
279	**AL3124-1204**	31.43	798	24.40	620	15.68	398	11.87	301	3.81	97	34.43	875	27.40	696	19.37	492	30.01	13.61	6.96	0.20
280	**AL3124-1604**	31.43	798	24.40	620	19.68	500	15.87	403	3.81	97	34.43	875	27.40	696	23.37	594	39.61	17.96	8.73	0.25
281	**AL3232-1111**	32.40	823	32.40	823	23.50	597	12.00	305	11.50	292	35.50	902	35.50	902	26.50	673	65.91	29.89	14.28	0.40
282	**AL3232-1412AC**	32.43	824	32.43	824	26.75	679	14.50	368	12.25	311	35.43	900	35.43	900	30.44	773	68.41	31.03	16.28	0.46
283	**AL3226-1404FT**	32.50	826	26.62	676	18.36	466	14.18	360	4.18	106	35.50	902	29.62	752	24.31	617	52.41	23.77	9.19	0.26
284	**AL3226-1604**	32.50	826	26.62	676	20.30	516	16.12	409	4.18	106	35.50	902	29.62	752	24.49	622	52.61	23.86	10.16	0.29
285	**AL3226-1413FT/AC/HL**	32.50	826	26.62	676	27.08	688	14.18	360	12.90	328	35.50	902	29.62	752	32.93	836	60.91	27.62	13.56	0.38
286	**AL3226-1613AC/HL**	32.50	826	26.62	676	29.02	737	16.12	409	12.90	328	35.50	902	29.62	752	33.21	844	62.51	28.35	14.53	0.41
287	**AL3232-1112**	32.60	828	32.60	828	23.70	602	11.40	290	12.40	315	35.60	904	35.60	904	27.30	693	74.91	33.97	14.58	0.41
288	**AL3232-1411**	32.60	828	32.60	828	25.70	653	14.70	373	11.00	279	35.60	904	35.60	904	29.30	744	71.01	32.21	15.81	0.45
289	**AL3428-0604**	34.00	864	27.50	699	9.88	251	6.12	155	3.75	95	37.00	940	30.50	775	12.19	310	38.91	17.64	5.35	0.15
290	**AL3428-1004**	34.00	864	27.50	699	13.56	344	9.81	249	3.75	95	37.00	940	30.50	775	15.75	400	48.61	22.04	7.34	0.21
291	**AL3428-0608AC/HL**	34.00	864	27.50	699	14.31	363	6.12	155	8.19	208	37.00	940	30.50	775	16.62	422	42.51	19.28	7.74	0.22
292	**AL3428-1008AC**	34.00	864	27.50	699	18.00	457	9.81	249	8.19	208	37.00	940	30.50	775	20.19	513	50.61	22.95	9.74	0.28
293	**AL3428-0614AC/HL**	34.00	864	27.50	699	20.37	517	6.12	155	14.35	364	37.00	940	30.50	775	22.68	576	47.51	21.55	11.02	0.31
294	**AL3428-1014AC/HL**	34.00	864	27.50	699	24.16	614	9.81	249	14.35	364	37.00	940	30.50	775	26.35	669	61.51	27.90	13.07	0.37
295	**AL3428-0625AC/HL**	34.00	864	27.50	699	30.92	785	6.12	155	24.80	630	37.00	940	30.50	775	33.23	844	57.01	25.85	16.73	0.47
296	**AL3428-1025AC/HL**	34.00	864	27.50	699	34.61	879	9.81	249	24.80	630	37.00	940	30.50	775	36.74	933	64.11	29.08	18.73	0.53
297	**AL3418-0505**	34.18	868	17.87	454	10.50	267	5.25	133	5.25	133	37.18	944	20.87	530	12.44	316	27.00	12.25	3.71	0.11
298	**AL3418-1005**	34.18	868	17.87	454	15.37	390	10.12	257	5.25	133	37.18	944	20.87	530	17.31	440	30.61	13.88	5.43	0.15
299	**AL3418-1005W**	34.18	868	17.87	454	15.37	390	10.12	257	5.25	133	37.18	944	20.87	530	17.31	440	30.61	13.88	5.43	0.15
300	**AL3424-0804**	34.25	870	24.18	614	12.30	312	8.00	203	4.30	109	37.25	946	27.18	690	14.49	368	34.31	15.56	5.89	0.17
301	**AL3424-0805**	34.25	870	24.18	614	13.25	337	8.00	203	5.25	133	37.25	946	27.18	690	15.44	392	36.81	16.69	6.35	0.18
302	**AL3424-1204**	34.25	870	24.18	614	16.30	414	12.00	305	4.30	109	37.25	946	27.18	690	18.49	470	40.01	18.14	7.81	0.22
303	**AL3424-1204W**	34.25	870	24.18	614	16.30	414	12.00	305	4.30	109	37.25	946	27.18	690	18.49	470	40.01	18.14	7.81	0.22
304	**AL3424-1205**	34.25	870	24.18	614	17.25	438	12.00	305	5.25	133	37.25	946	27.18	690	19.44	494	42.51	19.28	8.27	0.23
305	**AL3424-1205W**	34.25	870	24.18	614	17.25	438	12.00	305	5.25	133	37.25	946	27.18	690	19.44	494	42.51	19.28	8.27	0.23
306	**AL3434-1207**	34.38	873	34.38	873	19.75	502	12.50	318	7.25	184	37.38	949	37.38	949	22.43	570	55.21	25.04	13.51	0.38
307	**AL3434-2807**	34.38	873	34.38	873	34.93	887	27.68	703	7.25	184	37.38	949	37.38	949	38.43	976	66.81	30.30	23.89	0.68
308	**AL3434-1228AC**	34.38	873	34.38	873	41.00	1041	12.50	318	28.50	724	37.38	949	37.38	949	44.50	1130	87.01	39.46	28.05	0.79
309	**AL3434-2828AC**	34.38	873	34.38	873	56.24	1428	27.68	703	28.50	724	37.38	949	37.38	949	59.43	1510	72.11	32.70	38.47	1.09
310	**AL3535-1605**	35.50	902	35.50	902	20.87	530	15.75	400	5.12	130	38.50	978	38.50	978	24.19	614	68.01	30.84	15.22	0.43
311	**AL3535-1605LW**	35.50	902	35.50	902	20.87	530	15.75	400	5.12	130	38.50	978	38.50	978	24.19	614	68.01	30.84	15.22	0.43
312	**AL3620-0504**	35.87	911	19.87	505	9.00	229	5.00	127	4.00	102	38.87	987	22.87	581	10.80	274	23.40	10.61	3.71	0.11

AC = All Catch | FT = Fork Truckable | HL = Handle On Lid | LW = Light Lift | W = Moulded-in edge casters | Case model manufactured in Germany

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

NO.	Case Size	Interior Dimensions L in	L mm	W in	W mm	H in	H mm	Base in	Base mm	Lid in	Lid mm	Exterior Dimensions L in	L mm	W in	W mm	H in	H mm	Weight lbs	Weight kg	Volume ft³	Volume m³
313	**AL3620-0505**	35.87	911	19.87	505	10.12	257	5.00	127	5.12	130	38.87	987	22.87	581	12.30	312	25.60	11.61	4.17	0.12
314	**AL3620-0510AC/HL**	35.87	911	19.87	505	15.15	385	5.00	127	10.15	258	38.87	987	22.87	581	17.00	432	32.41	14.70	6.25	0.18
315	**AL3620-1704LW**	35.87	911	19.87	505	21.12	536	17.12	435	4.00	102	38.87	987	22.87	581	23.31	592	41.61	18.87	8.71	0.25
316	**AL3620-1704**	35.87	911	19.87	505	21.12	536	17.12	435	4.00	102	38.87	987	22.87	581	23.31	592	41.61	18.87	8.71	0.25
317	**AL3620-1705**	35.87	911	19.87	505	22.24	565	17.12	435	5.12	130	38.87	987	22.87	581	24.43	621	43.31	19.64	9.17	0.26
318	**AL3620-1710AC**	35.87	911	19.87	505	27.27	693	17.12	435	10.15	258	38.87	987	22.87	581	29.46	748	50.41	22.86	11.25	0.32
319	**AL3627-0805**	35.87	911	27.00	686	12.95	329	7.83	199	5.12	130	38.87	987	30.00	762	16.64	423	43.61	19.78	7.26	0.21
320	**AL3627-1505LW**	35.87	911	27.00	686	19.99	508	14.87	378	5.12	130	38.87	987	30.00	762	23.69	602	50.31	22.82	11.20	0.32
321	**AL3627-1505**	35.87	911	27.00	686	19.99	508	14.87	378	5.12	130	38.87	987	30.00	762	23.69	602	50.31	22.82	11.20	0.32
322	**AL3620-0512**	35.90	912	20.10	511	16.90	429	4.80	122	12.10	307	39.00	991	23.20	589	19.00	483	38.91	17.64	7.06	0.20
323	**AL3620-1712**	35.90	912	20.10	511	29.10	739	17.00	432	12.10	307	39.00	991	23.20	589	31.10	790	47.71	21.64	12.15	0.34
324	**AL3633-0405AC/HL**	36.31	922	33.31	846	10.15	258	4.50	114	5.65	144	39.31	998	36.31	922	11.84	301	43.01	19.50	7.10	0.20
325	**IS3721-1103W**	37.00	940	21.00	533	14.00	356	11.00	279	3.00	76	40.00	1016	24.00	610	16.00	406	38.01	17.24	6.30	0.18
326	**AL3825-2704**	37.63	956	24.63	626	30.44	773	26.44	672	4.00	102	40.75	1035	27.75	705	32.94	837	54.01	24.49	16.33	0.46
327	**AL3834-1605FT**	38.12	968	34.12	867	21.15	537	15.75	400	5.40	137	41.12	1044	37.12	943	26.97	685	71.01	32.21	15.92	0.45
328	**AL3834-1617FT/AC/HL**	38.12	968	34.12	867	33.00	838	15.75	400	17.25	438	41.12	1044	37.12	943	38.82	986	86.41	39.19	24.84	0.70
329	**AL3834-1628FT/AC**	38.12	968	34.12	867	44.06	1119	15.75	400	28.31	719	41.12	1044	37.12	943	49.88	1267	118.02	53.52	33.16	0.94
330	**AL4028-1608**	39.75	1010	27.75	705	23.65	601	15.47	393	8.18	208	42.75	1086	30.75	781	27.34	694	70.01	31.75	15.10	0.43
331	**AL4028-2105**	39.75	1010	27.75	705	25.55	649	20.37	517	5.18	132	42.75	1086	30.75	781	29.24	743	80.01	36.29	16.31	0.46
332	**AL4024-1310W**	40.00	1010	24.00	613	23.00	591	12.90	327	10.50	265	43.00	1089	27.00	694	26.00	650	52.00	23.50	12.71	0.36
333	**AL4024-1305W**	39.87	1013	24.31	617	18.00	457	12.75	324	5.25	133	42.87	1089	27.31	694	20.19	513	50.21	22.77	10.10	0.29
334	**AL4024-1305**	39.87	1013	24.31	617	18.00	457	12.75	324	5.25	133	42.87	1089	27.31	694	20.19	513	50.21	22.77	10.10	0.29
335	**AL4018-1003**	40.00	1016	18.00	457	13.19	335	10.19	259	3.00	76	43.00	1092	21.00	533	14.75	375	36.01	16.33	5.50	0.16
336	**AL4119-0704**	40.58	1031	19.10	485	11.60	295	7.13	181	4.50	114	43.70	1110	22.10	561	12.80	325	32.01	14.51	5.20	0.15
337	**AL4141-0808AC**	40.80	1036	40.80	1036	16.00	406	8.00	203	8.00	203	43.90	1115	43.90	1115	19.50	495	70.01	31.75	15.41	0.44
339	**AL4021-0804**	41.00	1041	20.87	530	11.00	279	7.20	183	3.80	97	44.00	1118	23.87	606	13.69	348	37.01	16.78	5.45	0.15
340	**AL4021-0804W**	41.00	1041	20.87	530	11.00	279	7.20	183	3.80	97	44.00	1118	23.87	606	13.69	348	37.01	16.78	5.45	0.15
341	**AL4021-0808W**	41.00	1041	20.87	530	14.91	379	7.20	183	7.71	196	44.00	1118	23.87	606	17.60	447	41.01	18.60	7.38	0.21
342	**AL4141-0826AC**	41.00	1041	41.00	1041	34.00	864	8.25	210	25.75	654	44.00	1118	44.00	1118	35.50	902	114.02	51.71	33.08	0.94
343	**AL4141-0836AC**	41.00	1041	41.00	1041	43.75	1111	8.25	210	35.50	902	44.00	1118	44.00	1118	45.50	1156	123.02	55.79	42.56	1.21
344	**AL4141-0846AC**	41.00	1041	41.00	1041	53.75	1365	8.25	210	45.50	1156	44.00	1118	44.00	1118	55.50	1410	132.02	59.87	52.29	1.48
345	**AL4421-0813**	44.13	1121	21.13	537	21.25	540	8.13	207	13.12	333	47.25	1200	24.25	616	23.75	603	53.47	24.25	11.47	0.32
346	**AL4416-1026**	44.41	1128	16.26	413	36.91	938	10.38	264	26.53	674	47.50	1207	19.35	491	38.47	977	69.51	31.52	15.42	0.44
347	**IS4517-1103W**	45.00	1143	17.00	432	14.00	356	11.00	279	3.00	76	48.00	1219	20.00	508	16.00	406	38.01	17.24	6.20	0.18
348	**IS4521-2303**	45.00	1143	21.00	533	26.00	660	23.00	584	3.00	76	48.00	1219	24.00	610	32.00	813	72.01	32.66	14.22	0.40
349	**AL4532-0506**	45.00	1143	32.00	813	11.25	286	5.25	133	6.00	152	48.00	1219	35.00	889	14.50	368	63.21	28.67	9.38	0.27
350	**AL4532-0515FT/AC/HL**	45.00	1143	32.00	813	20.12	511	5.25	133	14.87	378	48.00	1219	35.00	889	25.00	635	81.21	36.83	16.77	0.47
351	**AL4532-1606**	45.00	1143	32.00	813	21.50	546	15.50	394	6.00	152	48.00	1219	35.00	889	26.00	660	82.01	37.19	17.92	0.51
352	**AL4532-0519**	45.00	1143	32.01	813	24.20	615	5.25	133	19.00	483	48.00	1219	35.20	894	31.40	798	67.01	30.39	20.17	0.57
353	**AL4532-1615AC/HL**	45.00	1143	32.00	813	30.37	771	15.50	394	14.87	378	48.00	1219	35.00	889	35.06	891	97.22	44.09	25.31	0.72

AC = All Catch | HL = Handle On Lid | FT = Fork Truckable | LW = Light Lift | W = Moulded-in edge casters | Case model manufactured in Germany

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

NO.	Case Size	Interior Dimensions L in	L mm	W in	W mm	H in	H mm	Base in	Base mm	Lid in	Lid mm	Exterior Dimensions L in	L mm	W in	W mm	H in	H mm	Weight lbs	Weight kg	Volume ft³	Volume m³
354	**AL4532-1619**	45.00	1143	32.00	813	34.60	879	15.60	396	19.00	483	48.00	1219	35.00	889	38.90	988	77.91	35.33	28.83	0.82
355	**IS4537-2303**	45.00	1143	37.00	940	26.00	660	23.00	584	3.00	76	48.00	1219	40.00	1016	32.00	813	93.02	42.18	25.05	0.71
356	**AL4714-0403**	46.87	1190	14.06	357	7.00	178	4.00	102	3.00	76	49.87	1267	17.06	433	8.69	221	26.40	11.97	2.67	0.08
357	**AL4714-0503W**	46.87	1190	14.06	357	8.25	210	5.25	133	3.00	76	49.87	1267	17.06	433	9.94	252	27.50	12.47	3.15	0.09
358	**AL4714-0503**	46.87	1190	14.06	357	8.25	210	5.25	133	3.00	76	49.87	1267	17.06	433	9.94	252	27.50	12.47	3.15	0.09
359	**AL4714-0405**	46.87	1190	14.06	357	9.25	235	4.00	102	5.25	133	49.87	1267	17.06	433	10.94	278	27.10	12.29	3.53	0.10
360	**AL4714-0505W**	46.87	1190	14.06	357	10.50	267	5.25	133	5.25	133	49.87	1267	17.06	433	12.19	310	29.51	13.38	4.00	0.11
361	**AL4714-0505**	46.87	1190	14.06	357	10.50	267	5.25	133	5.25	133	49.87	1267	17.06	433	12.19	310	29.51	13.38	4.00	0.11
362	**AL4824-1404**	48.62	1235	24.62	625	17.67	449	13.80	351	3.87	98	51.62	1311	27.62	702	21.36	543	57.91	26.26	12.24	0.35
363	**AL4824-1604**	48.62	1235	24.62	625	19.67	500	15.80	401	3.87	98	51.62	1311	27.62	702	23.36	593	57.31	25.99	13.63	0.39
364	**AL4824-1408AC**	48.62	1235	24.62	625	21.92	557	13.80	351	8.12	206	51.62	1311	27.62	702	25.61	650	64.51	29.26	15.18	0.43
365	**AL4824-1608**	48.62	1235	24.62	625	23.92	608	15.80	401	8.12	206	51.62	1311	27.62	702	27.61	701	63.81	28.94	16.57	0.47
366	**AL4915-1105**	49.00	1245	14.81	376	16.25	413	11.00	279	5.25	133	52.00	1321	17.81	452	18.44	468	40.01	18.14	6.82	0.19
367	**AL5040-1204**	50.12	1273	40.00	1016	15.87	403	12.12	308	3.75	95	53.12	1349	43.00	1092	19.06	484	90.02	40.82	18.41	0.52
368	**AL5040-1212AC**	50.12	1273	40.00	1016	23.99	609	12.12	308	11.87	301	53.12	1349	43.00	1092	27.19	691	103.02	46.72	27.83	0.79
369	**AL5023-0911**	50.50	1283	23.30	592	20.10	511	9.10	231	11.00	279	53.50	1359	26.30	668	23.50	597	50.91	23.09	13.69	0.39
370	**AL5135-0718FT**	51.01	1296	35.04	890	25.22	641	6.81	173	18.41	468	54.01	1372	38.04	966	32.00	813	103.52	46.95	26.09	0.74
371	**AL5149-1005**	51.08	1297	49.08	1247	14.87	378	10.06	256	4.81	122	54.25	1378	52.25	1327	18.24	463	96.02	43.54	21.57	0.61
372	**AL5240-1138AC/HL**	52.00	1321	40.00	1016	49.00	1245	11.00	279	38.00	965	55.00	1397	43.00	1092	52.69	1338	143.12	64.91	58.98	1.67
373	**AL5231-0807**	52.38	1330	30.88	784	14.50	368	7.50	191	7.00	178	55.50	1410	34.00	864	17.00	432	56.71	25.72	13.57	0.38
374	**AL5231-1407**	52.38	1330	30.88	784	21.00	533	14.00	356	7.00	178	55.00	1397	34.00	864	23.50	597	64.61	29.30	19.66	0.56
375	**AL5324-0805**	53.50	1359	24.50	622	13.30	338	8.20	208	5.10	130	56.50	1435	27.50	699	15.30	389	56.21	25.49	10.09	0.29
376	**AL5424-2306FT/AC**	53.87	1368	23.93	608	28.87	733	22.75	578	6.12	155	56.87	1444	26.93	684	33.75	857	104.32	47.31	21.54	0.61
377	**AL5415-0504W**	53.90	1369	15.40	391	9.50	241	5.30	135	4.20	107	56.90	1445	18.50	470	11.30	287	31.51	14.29	4.56	0.13
378	**AL5415-0504**	53.90	1369	15.40	391	9.50	241	5.30	135	4.20	107	56.90	1445	18.50	470	11.30	287	31.51	14.29	4.56	0.13
379	**AL5415-1026AC**	54.60	1387	15.90	404	35.90	912	10.00	254	25.90	658	57.60	1463	18.90	480	37.50	953	89.52	40.60	18.04	0.51
380	**AL5430-3006AC**	53.88	1369	29.81	757	35.93	913	29.87	759	6.06	154	56.88	1445	32.81	833	39.62	1006	114.02	51.71	33.40	0.95
381	**AL5430-0418AC**	53.90	1369	30.10	765	22.60	574	4.60	117	18.10	460	57.00	1448	33.20	843	25.80	655	73.01	33.11	21.22	0.60
382	**AL5545-0605AC**	55.50	1410	45.50	1156	11.40	290	6.30	160	5.12	130	58.50	1486	48.50	1232	15.00	381	73.81	33.48	16.66	0.47
383	**AL5545-2305AC**	55.50	1410	45.50	1156	27.92	709	22.80	579	5.12	130	58.50	1486	48.50	1232	31.61	803	145.32	65.91	40.80	1.16
384	**AL5545-0623AC-HL**	55.50	1410	45.50	1156	30.62	778	8.06	205	22.56	573	58.50	1486	48.50	1232	34.25	870	157.03	71.21	44.75	1.27
385	**AL5545-2323AC**	55.50	1410	45.50	1156	45.36	1152	22.80	579	22.56	573	58.50	1486	48.50	1232	49.05	1246	179.03	81.19	66.29	1.88
386	**AL5632-0404FT**	56.05	1424	32.42	823	8.31	211	3.98	101	3.88	99	59.06	1500	35.43	900	14.00	356	55.60	25.22	8.74	0.25
387	**AL5616-0604**	56.43	1433	16.25	413	10.07	256	5.87	149	4.20	107	59.43	1510	19.25	489	12.76	324	42.41	19.23	5.34	0.15
388	**AL5616-0604W**	56.43	1433	16.25	413	10.07	256	5.87	149	4.20	107	59.43	1510	19.25	489	12.76	324	42.41	19.23	5.34	0.15
389	**AL5733-0906**	56.60	1438	33.00	838	13.20	335	9.60	244	3.60	91	60.00	1524	36.00	914	22.80	579	76.61	34.75	14.27	0.40
390	**AL5733-0916FT/AC**	56.87	1444	32.75	832	25.06	637	9.06	230	16.00	406	59.87	1521	35.75	908	35.63	905	123.42	55.97	27.01	0.76
391	**AL5757-0806**	56.89	1445	56.89	1445	14.30	363	8.10	206	6.20	157	60.00	1524	60.00	1524	21.42	544	103.02	46.72	26.78	0.76
392	**AL5834-0111**	58.24	1479	34.24	870	12.75	324	1.75	44	11.00	279	61.25	1556	37.25	946	16.25	413	109.02	49.44	14.71	0.42

AC = All Catch | HL = Handle On Lid | FT = Fork Truckable | W = Moulded-in edge casters | Case model manufactured in Germany

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.

NO.	Case Size	Interior Dimensions L in	L mm	W in	W mm	H in	H mm	Base in	Base mm	Lid in	Lid mm	Exterior Dimensions L in	L mm	W in	W mm	H in	H mm	Weight lbs	Weight kg	Volume ft^3	Volume m^3
393	**AL5834-0711**	58.24	1479	34.24	870	18.75	476	7.75	197	11.00	279	61.25	1556	37.25	946	22.25	565	124.02	56.25	21.64	0.61
394	**AL5834-1011**	58.24	1479	34.24	870	20.69	526	9.69	246	11.00	279	61.25	1556	37.25	946	26.25	667	132.02	59.87	23.88	0.68
395	**AL5834-1028**	58.30	1481	34.30	871	41.00	1041	9.75	248	27.90	709	61.30	1557	37.30	947	43.50	1105	105.92	48.04	47.45	1.34
396	**AL5834-1040**	58.30	1481	34.30	871	50.00	1270	9.75	248	40.30	1024	61.30	1557	37.30	947	55.40	1407	142.42	64.59	57.86	1.64
397	**AL5834-0128FT/AC/HL**	58.31	1481	34.25	870	29.55	751	1.62	41	27.93	709	61.31	1557	37.25	946	32.87	835	126.02	57.15	34.15	0.97
398	**AL5834-0728FT/AC/HL**	58.31	1481	34.25	870	35.55	903	7.62	194	27.93	709	61.31	1557	37.25	946	38.87	987	138.92	63.00	41.09	1.16
399	**AL5834-0140FT/AC**	58.31	1481	34.25	870	41.62	1057	1.62	41	40.00	1016	61.31	1557	37.25	946	45.25	1149	134.02	60.78	48.10	1.36
400	**AL5834-0740FT/AC**	58.31	1481	34.25	870	47.62	1210	7.62	194	40.00	1016	61.31	1557	37.25	946	51.19	1300	141.02	63.96	55.04	1.56
401	**AL5824-1119AC**	58.62	1489	24.12	613	30.18	767	11.00	279	19.18	487	61.62	1565	27.12	689	33.87	860	76.51	34.70	24.69	0.70
402	**AL5910-0604**	59.06	1500	9.91	252	10.30	262	6.18	157	4.12	105	62.06	1576	12.91	328	12.25	311	31.61	14.33	3.49	0.10
403	**AL5924-1018AC**	59.25	1505	24.25	616	28.32	719	10.13	257	18.19	462	62.25	1581	27.25	692	29.69	754	74.01	33.57	23.55	0.67
404	**AL5924-1009**	59.30	1506	24.30	617	19.30	490	10.10	257	9.20	234	62.30	1582	27.30	693	21.60	549	61.31	27.81	16.09	0.46
405	**AL6124-0805FT**	61.16	1553	24.28	617	13.63	346	8.07	205	5.56	141	64.18	1630	27.11	689	20.49	520	60.15	27.28	11.71	0.33
406	**AL6242-2408**	61.97	1574	42.31	1075	31.94	811	24.00	610	8.00	203	65.98	1676	45.67	1160	39.59	1006	127.02	57.61	48.46	1.37
407	**AL6638-0605AC**	67.25	1708	37.75	959	10.88	276	5.94	151	4.94	125	70.50	1791	41.00	1041	14.44	367	90.92	41.23	15.98	0.45
408	**BL6752-0805AC/HL**	67.43	1713	51.87	1317	13.16	334	8.03	204	5.13	130	70.43	1789	54.87	1394	18.66	474	145.02	65.77	26.64	0.75
409	**AL6815-1032AC**	67.70	1720	14.90	378	42.00	1067	10.00	254	32.00	813	70.80	1798	18.00	457	43.50	1105	78.01	35.38	24.52	0.69
410	**AL6815-1005**	68.00	1727	15.25	387	15.32	389	10.12	257	5.20	132	71.00	1803	18.25	464	17.13	435	58.51	26.54	9.19	0.26
411	**AL6821-1105**	68.38	1737	21.38	543	16.44	418	11.19	284	5.25	133	71.50	1816	24.50	622	19.94	506	65.21	29.57	13.91	0.39
412	**AL6924-1305**	68.98	1752	24.28	617	18.14	461	12.70	323	5.44	138	72.00	1829	27.30	693	20.62	524	69.03	31.31	17.58	0.50
413	**AL6912-1003**	69.37	1762	12.00	305	14.09	358	10.49	266	3.60	91	72.37	1838	15.00	381	16.28	414	42.01	19.05	6.79	0.19
414	**AL7007-0403AC**	70.25	1784	7.00	178	7.00	178	4.00	102	3.00	76	73.25	1861	10.00	254	9.75	248	30.01	13.61	1.99	0.06
415	**AL7208-0403**	72.00	1829	8.00	203	8.40	213	4.40	112	4.00	102	75.00	1905	11.00	279	10.60	269	30.51	13.83	2.80	0.08
416	**AL7430-0418AC**	73.78	1874	29.78	756	22.65	575	4.64	118	18.02	458	77.00	1956	33.00	838	26.25	667	112.02	50.80	28.80	0.82
417	**AL7819-0805**	78.87	2003	19.43	494	13.28	337	8.25	210	5.03	128	80.75	2051	22.43	570	14.97	380	60.81	27.58	11.78	0.33
418	**AL7819-0808AC**	78.87	2003	19.43	494	16.28	414	8.25	210	8.03	204	80.75	2051	22.43	570	17.97	456	61.81	28.03	14.44	0.41
419	**BL8024-3009AC**	80.43	2043	24.43	621	39.24	997	30.12	765	9.12	232	84.43	2145	28.43	722	43.81	1113	159.53	72.35	44.62	1.26
420	**BL8240-1623FT/AC**	81.75	2076	40.00	1016	38.87	987	16.12	409	22.75	578	85.75	2178	44.00	1118	48.06	1221	229.24	103.96	73.56	2.08
421	**BL8232-0705AC**	81.87	2079	31.93	811	12.37	314	7.25	184	5.12	130	85.87	2181	35.93	913	16.81	427	122.32	55.47	18.71	0.53
422	**BL8232-0905AC**	81.87	2079	31.93	811	14.12	359	9.00	229	5.12	130	85.87	2181	35.93	913	18.56	471	128.02	58.06	21.36	0.60
423	**BL8537-2906AC**	85.23	2165	37.73	958	35.23	895	29.19	741	6.04	153	89.23	2266	41.73	1060	39.60	1006	190.03	86.18	65.56	1.86
424	**BL8653-5010**	86.00	2184	53.00	1346	60.00	1524	10.00	254	50.00	1270	90.00	2286	57.00	1448	64.60	1641	287.55	130.41	158.27	4.48
425	**BL9053-1035AC**	90.00	2286	53.00	1346	45.50	1156	10.25	260	35.25	895	94.00	2388	57.00	1448	50.00	1270	278.05	126.10	125.60	3.56
426	**BL9024-1113FT/AC**	91.00	2311	24.19	614	25.10	638	11.76	299	13.35	339	95.00	2413	28.19	716	33.26	845	147.23	66.77	31.98	0.91
427	**BL9836-1105AC**	97.80	2484	35.90	912	16.10	409	11.00	279	5.10	130	101.80	2586	39.90	1013	20.79	528	190.03	86.18	32.71	0.93
428	**BL9836-3705AC**	97.80	2484	35.90	912	42.10	1069	37.00	940	5.10	130	101.80	2586	39.90	1013	46.79	1188	242.04	109.77	85.54	2.42
429	**BL11433-0527AC**	114.00	2896	33.00	838	32.62	829	5.38	137	27.25	692	118.00	2997	37.00	940	34.31	871	210.04	95.25	71.02	2.01
430	**BL13022-0813FT**	130.00	3302	22.00	559	19.50	495	7.00	178	12.50	318	134.00	3404	26.00	660	27.75	705	136.42	61.87	32.27	0.91
431	**AL13115-0805FT**	131.00	3327	15.00	381	13.25	337	8.25	210	5.00	127	134.00	3404	18.00	457	17.97	456	97.02	44.00	15.07	0.43
432	**BL15135-1321FT**	151.10	3838	33.90	861	34.80	884	21.00	533	13.30	338	155.50	3950	38.40	975	42.30	1074	297.05	134.72	103.16	2.92

AC = All Catch | FT = Fork Truckable | HL = Handle On Lid | 🇩🇪 Case model manufactured in Germany

Internal and external dimensions mentioned in the table are approximate and subject to general tolerances. These dimensions are given as a guidance to determine the right container.



STANDARD COLOURS

SINGLE LID CASES

- Gray – 133 Fed Std# 26270
- Tan – 250 Fed Std# 20372
- Blue – 135(lt) Pantone# 292U
- White – 132 Fed Std# 27925
- Yellow – 136 Pantone# 012U
- Green – 138 (forest) Fed Std# 24052
- Orange – 134 Fed Std# 12197
- Yellow – 131 Fed Std# 23538
- Maroon – 197 Pantone# 202U
- Blue – 101(dk) Fed Std# 25052
- Black – 032 Fed Std# 27040
- Red – 130 Fed Std# 21105
- Olive Drab – 137 Fed Std# 34096
- Purple – 129 Pantone# 245U

Some options are not available on all case sizes and availability is subject to change at manufacturer's discretion.

LIGHT LIFT CASES

- Gray – 572 Fed Std# 26270
- Tan – 587 Fed Std# 20372
- White – 586 Fed Std# 27925
- White – 132 Fed Std# 27925
- Blue – 585(dk) Fed Std# 25052
- Black – 583 Fed Std# 27040
- Olive Drab – 584 Fed Std# 34096

Case colours may differ slightly from printed version.

SINGLE LID

OPTIONS

Use of Military image does not imply or constitute Department of Defense endorsement



HARD PROTECTION SYSTEMS

When foam is not appropriate, Peli specialises in custom metal work. Cradles or frames hold sensitive parts away from the walls of the case. The area between the frame and the case is the “sway space”, and dampeners are used to isolate the part from shock and vibration. Dampeners can be mounted foam bumpers, or elastomeric shock mounts that can mitigate impacts up to 15 G forces.

Extreme case work:
Engineered cradles for secure transport.

SELECTING THE CASE HARDWARE- IT’S ALL ABOUT YOU

Getting your equipment safely from point A to point B is paramount. To move your case around you might need wheels, or if the load is extreme we can install forklift spacers and a bash-plate. We can also help you with technical choices, such as standard or mil-spec purge valves (prevents vacuum lock in the event of altitude change). The list goes on: from handles and latches to desiccant chambers for removing humidity from the case.






TESTING... 1-2-3

The time to find out if your equipment is going to arrive intact is before it ships. That’s why we have a full service test lab to verify survivability. As a matter of fact, Peli operates one of the few certified test labs in the country. Drop tests, immersion, temperature extremes, G-force and vibration: we do it all to prove our cases perform to your specifications.

For the most up-to-date information, please visit www.peli.com

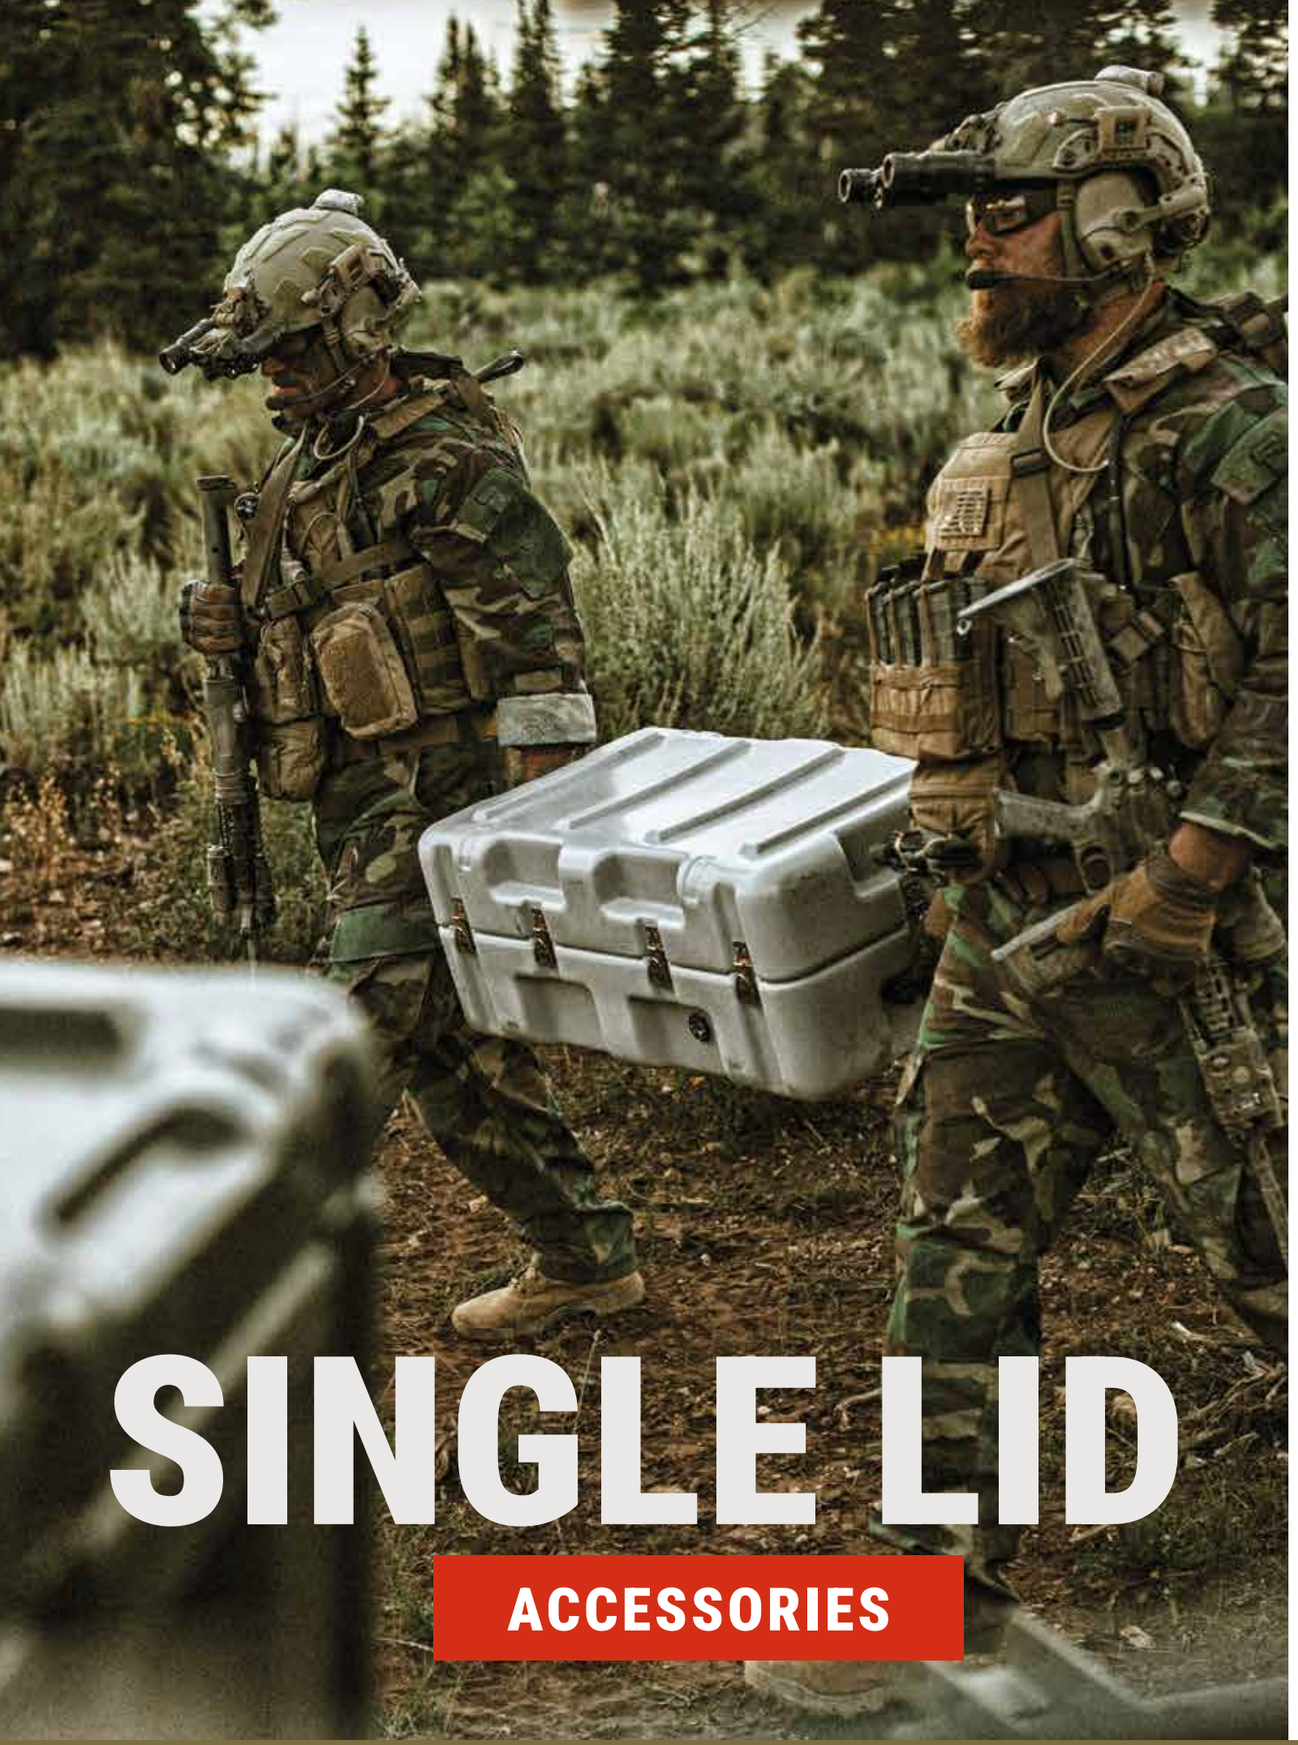

SINGLE LID

ACCESSORIES



PRESSURE RELIEF VALVE (PRV)



EXTRA PLASTIC HANDLES



CARBON STEEL OR STAIN-LESS STEEL METAL HANDLES



BOTTOM AND SIDE CASTERS



EDGE CASTERS



T-HANDLE AND BUMPER KIT



CARD HOLDER



FLANGEMOUNT™ CASES



FORKLIFT BASH PLATES



FORKLIFT PROVISION, SKID RUNNERS



FRONT LABELS



HARDWARE STAINLESS STEEL PASSIVATED FINISH



BLACK CARBON STEEL OR BLACK STAINLESS STEEL HARDWARE



HINGED LID WITH CABLE STAY



LOCKABLE CABLE CATCH



LOCKABLE PADLOCK HASP



CUSTOM STENCILING



ID PLATE




STANDARD LABELS



HUMIDITY INDICATOR INDICATES 20%, 30%, AND 40% RELATIVE HUMIDITY RANGES



LIFTING RINGS/ TIE DOWN RINGS



AIRTIGHT CERTIFIED

For the most up-to-date information, please visit www.peli.com



PELI-HARDIGG™
TECHNICAL SOLUTIONS

EMEAI HEADQUARTERS
PELI PRODUCTS, S.L.U.
C/ Provença, 388 Planta 6
08025 Barcelona • Spain
Tel +34 934 674 999

PELI PRODUCTS
FRANCE S.A.S.
20/22 Rue des Petits Hôtels
75010 Paris • France
Tel +33 (0)1 44 83 95 63

PELI PRODUCTS
GERMANY GmbH
Neudorfer Strasse 285 C
09474 Crottendorf • Germany
Tel +49 (0)37344 313999

©2026 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its parent, subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com.
Part No. 0030-001-900E SEP26

PELI.COM